


Overview

HP EliteDesk 800 G1 Desktop Mini Business PC

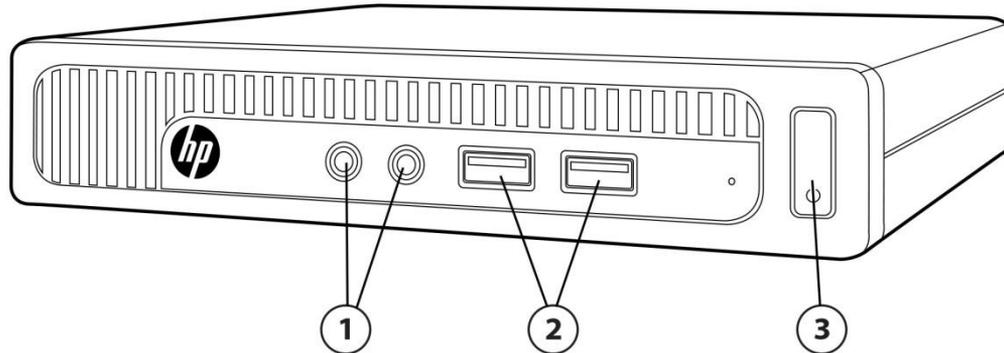


1. 3.5mm headphone output and microphone jacks
2. (2) Front USB 3.0 ports (1 USB Fast charging port)
3. Power button and PC status LED

Not Shown

- | | |
|----------|---|
| Slots | (1) internal M.2 connector for optional wireless NIC
(1) internal M.2 connector for optional SSD drive (Available Jun '14) |
| Bays | (1) 2.5" internal storage drive bay |
| Rear I/O | (4) USB 3.0 ports
(1) VGA video port; (2) DisplayPort with multi-stream video ports
(1) RJ-45 network connector
3.5mm audio out jack |
| VESA | Support for VESA 100 mounting system on bottom of PC chassis |

HP EliteDesk 800 G1 Ultra-slim Desktop Business PC

Overview

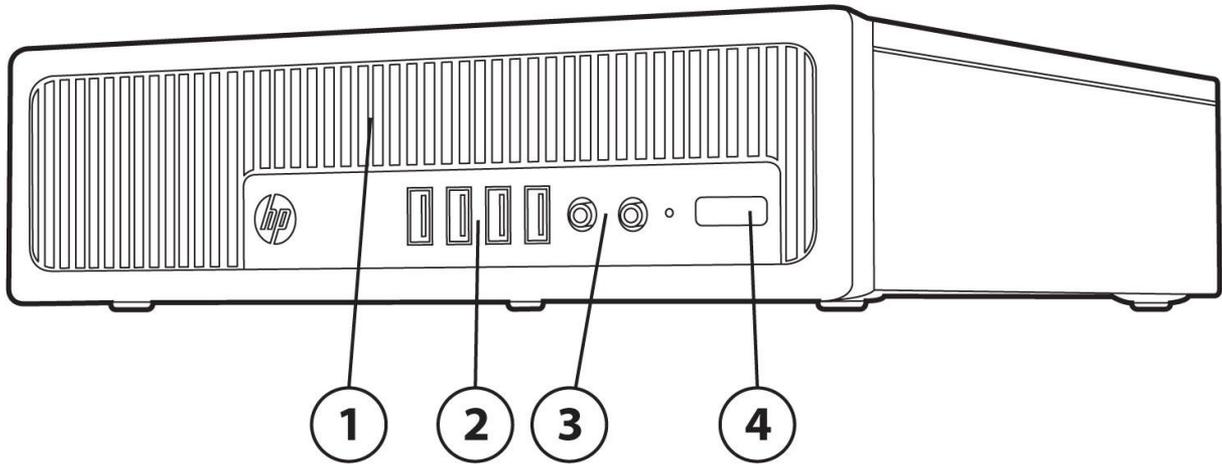


1. Slim drive bay supporting an optical disk drive (located behind removable bezel)
2. (2) USB 3.0 ports, (2) USB 2.0 ports
3. 3.5mm headphone output and microphone jacks
4. Power button and PC status LED

Not Shown

- Slots (1) internal mSATA connector
(1) internal PCI Express mini-card connector
(1) MXM graphics connector
- Bays (1) 2.5" internal storage drive bay
- Rear I/O (2) USB 3.0 ports; (4) USB 2.0 ports
(1) VGA video port; (2) DisplayPort with multi-stream video ports
(1) RJ-45 network connector
3.5mm audio in/out jacks
PS/2 keyboard and mouse ports
- VESA Support for VESA 100 mounting system on top and bottom of PC chassis

HP EliteDesk 800 G1 Small Form Factor Business PC

Overview

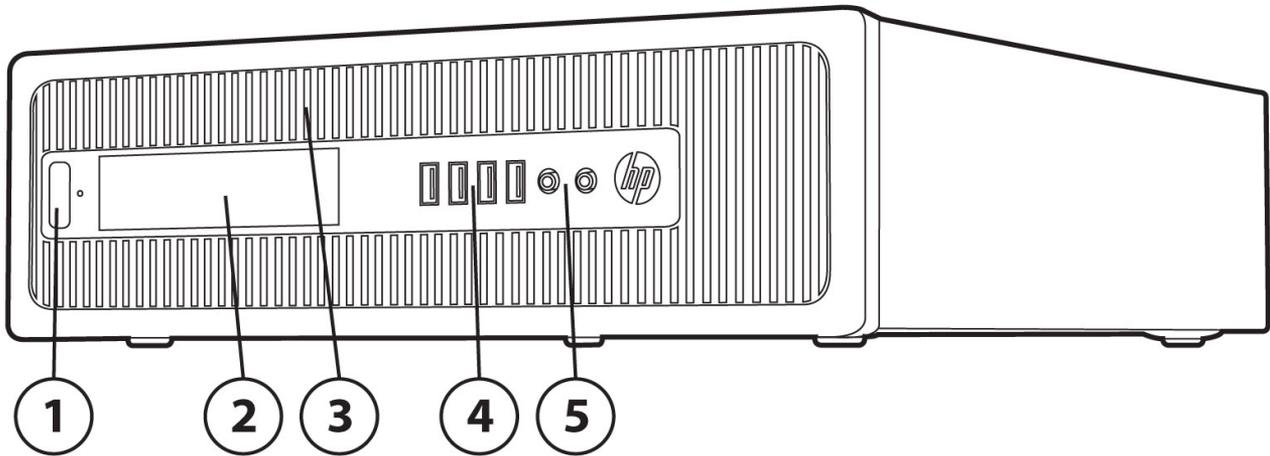


1. Power button and PC status LED
2. 3.5" external drive bay; used for installing a Media Card Reader or 2nd data storage drive
3. Slim drive bay supporting an optical disk drive (located behind removable bezel)
4. (2) USB 3.0 ports, (2) USB 2.0 ports
5. 3.5mm headphone output and microphone jack

Not Shown

- | | |
|----------|---|
| Slots | (2) PCI Express x16 graphics connectors; one wired as a x4
(2) PCI Express x1 accessory connectors |
| Bays | (1) 2.5" internal storage drive bay
(1) 3.5" internal storage drive bay |
| Rear I/O | (2) USB 3.0 ports; (4) USB 2.0 ports
(1) VGA video port; (2) DisplayPort with multi-stream video ports
(1) RJ-45 network connector
(1) RS-232 serial port
3.5mm audio in/out jacks
PS/2 keyboard and mouse ports |

HP EliteDesk 800 G1 Tower Business PC

Overview

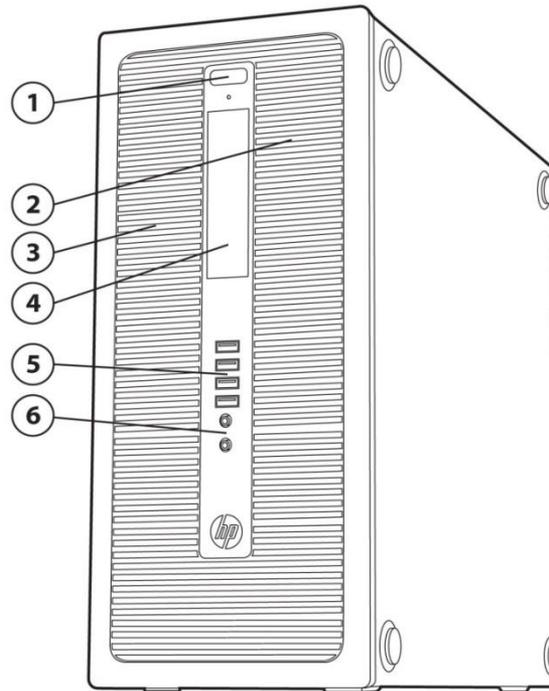

1. Power button and PC status LED
2. Slim drive bay supporting an optical disk drive (located behind removable bezel)
3. 5.25" half height external drive bay (located behind removable bezel)
4. 3.5" external drive bay; used for installing a Media Card Reader
5. (2) USB 3.0 ports, (2) USB 2.0 ports
6. 3.5mm headphone output and microphone jack

Not Shown

- | | |
|----------|---|
| Slots | (2) PCI Express x16 graphics connectors; one wired as a x4
(2) PCI Express x1 accessory connectors
(1) PCI accessory connector (optional) |
| Bays | (1) 2.5" internal storage drive bay
(2) 3.5" internal storage drive bays |
| Rear I/O | (2) USB 3.0 ports; (4) USB 2.0 ports
(1) VGA video port; (2) DisplayPort with multi-stream video ports
(1) RJ-45 network connector
(1) RS-232 serial port
3.5mm audio in/out jacks
PS/2 keyboard and mouse ports |

Overview

At A Glance

- Choice of four chassis form factors: Desktop Mini, Ultra-slim Desktop, Small Form Factor and Tower
- PC chassis and all internal components and modules are manufactured with low halogen content
- HP developed and engineered UEFI BIOS supporting security, manageability and software image stability
- Intel® Q87 chipset supporting Intel 4th generation Core processors, featuring integrated Intel HD Graphics and Intel® vPro™ Technology (available with select processors)
- Intel® Ethernet Connection I217L GbE LOM integrated network connection
- DDR3 Synchronous Dynamic Random Access Memory (SDRAM)
- Multi-independent monitor support via VGA and dual digital DisplayPort video interfaces with multi-stream
- DTS Studio Sound audio management software
- Standard and high efficiency energy saving power supply options
- SFF and TWR models can be configured with multiple data drives in a RAID array
- Optional Intel Smart Response Technology disk cache modules
- ENERGY STAR® qualified and certified EPEAT® Gold models
- Guaranteed lengthy purchase lifecycles and image stability

Standard Features and Configurable Components

OPERATING SYSTEMS

Preinstalled When Purchased

Windows 8.1 Pro (64-bit)*

Windows 8.1 (64-bit)*

Windows 7 Ultimate (32-bit)**

Windows 7 Ultimate (64-bit)**

Windows 7 Professional (32-bit)**

Windows 7 Professional (64-bit)**

Windows 7 Professional (32-bit) (available through downgrade rights from Windows 8.1 Pro)***

Windows 7 Professional (64-bit) (available through downgrade rights from Windows 8.1 Pro)***

Windows 7 Home Premium (32-bit)**

Windows 7 Home Premium (64-bit)**

FreeDOS 2.0

Novell SUSE Linux Enterprise Desktop 11

*Not all features are available in all editions of Windows 8.1. Systems may require upgraded and/or separately purchased hardware, drivers and/or software to take full advantage of Windows 8.1 functionality. See <http://www.microsoft.com>.

**Not all features are available in all editions of Windows 7. This system may require upgraded and/or separately purchased hardware to take full advantage of Windows 7 functionality. See <http://www.microsoft.com/windows/windows-7/> for details.

***This system is preinstalled with Windows 7 Pro software and also comes with a license and media for Windows 8.1 Pro software. You may only use one version of the Windows software at a time. Switching between versions will require you to uninstall one version and install the other version. You must back up all data (files, photos, etc.) before uninstalling and installing operating systems to avoid loss of your data.

CHIPSET

	<u>DM</u>	<u>USDT</u>	<u>SFF/TW</u>
Intel® Q87 Express	X	X	X

PROCESSOR

Intel® 4th Generation Core™ i7 Processors

Intel® Core™ i7-4790 Processor

Up to 4.0 GHz Max. Turbo Frequency (3.6 GHz base frequency)

8 MB cache, 4 cores, 8 threads

Intel HD Graphics 4600

Supports DDR3 memory up to 1600 MT/s data rate

Supports Intel® vPro™ Technology and Intel® Stable Image Platform Program (SIPP)

Intel® Core™ i7-4790S Processor

Up to 4.0 GHz Max. Turbo Frequency (3.2 GHz base frequency)

8 MB cache, 4 cores, 8 threads

Intel HD Graphics 4600

Supports DDR3 memory up to 1600 MT/s data rate

Supports Intel® vPro™ Technology and Intel® Stable Image Platform Program (SIPP)

Intel® Core™ i7-4785T Processor

Up to 3.2 GHz Max. Turbo Frequency (2.2 GHz base frequency)

8 MB cache, 4 cores, 8 threads

Intel® HD Graphics 4600

Supports DDR3 memory up to 1600 MT/s data rate

<u>DM</u>	<u>USDT</u>	<u>SFF/TWR</u>
		X

X

X

Standard Features and Configurable Components

Supports Intel® vPro™ Technology and Intel® Stable Image Platform Program (SIPP)

Intel® Core™ i7-4771 Processor

Up to 3.9 GHz Max. Turbo Frequency (3.5 GHz base frequency)

8 MB cache, 4 cores, 8 threads

Intel HD Graphics 4600

Supports DDR3 memory up to 1600 MT/s data rate

Supports Intel® vPro™ Technology and Intel® Stable Image Platform Program (SIPP)

X

Intel® Core™ i7-4770 Processor

Up to 3.9 GHz Max. Turbo Frequency (3.4 GHz base frequency)

8 MB cache, 4 cores, 8 threads

Intel HD Graphics 4600

Supports DDR3 memory up to 1600 MT/s data rate

Supports Intel® vPro™ Technology and Intel® Stable Image Platform Program (SIPP)

X

Intel® Core™ i7-4770S Processor

Up to 3.9 GHz Max. Turbo Frequency (3.1 GHz base frequency)

8 MB cache, 4 cores, 8 threads

Intel HD Graphics 4600

Supports DDR3 memory up to 1600 MT/s data rate

Supports Intel® vPro™ Technology and Intel® Stable Image Platform Program (SIPP)

X

Intel® Core™ i7-4765T Processor

Up to 3.0 GHz Max. Turbo Frequency (2.0 GHz base frequency)

8 MB cache, 4 cores, 8 threads

Intel HD Graphics 4600

Supports DDR3 memory up to 1600 MT/s data rate

Supports Intel® vPro™ Technology and Intel® Stable Image Platform Program (SIPP)

X

Intel® 4th Generation Core™ i5 Processors

Intel® Core™ i5-4690 Processor

Up to 3.9 GHz Max. Turbo Frequency (3.5 GHz base frequency)

6 MB cache, 4 cores, 4 threads

Intel HD Graphics 4600

Supports DDR3 memory up to 1600 MT/s data rate

Supports Intel® vPro™ Technology and Intel® Stable Image Platform Program (SIPP)

DM

USDT

SFF/TWR

X

Intel® Core™ i5-4690S Processor

Up to 3.9 GHz Max. Turbo Frequency (3.2 GHz base frequency)

6 MB cache, 4 cores, 4 threads

Intel® HD Graphics 4600

Supports DDR3 memory up to 1600 MT/s data rate

Supports Intel® vPro™ Technology and Intel® Stable Image Platform Program (SIPP)

X

Intel® Core™ i5-4590 Processor

Up to 3.7 GHz Max. Turbo Frequency (3.3 GHz base frequency)

6 MB cache, 4 cores, 4 threads

Intel HD Graphics 4600

Supports DDR3 memory up to 1600 MT/s data rate

Supports Intel® vPro™ Technology and Intel® Stable Image Platform Program (SIPP)

X

Standard Features and Configurable Components

<p><u>Intel® Core™ i5-4590S Processor</u> Up to 3.7 GHz Max. Turbo Frequency (3.0 GHz base frequency) 6 MB cache, 4 cores, 4 threads Intel HD Graphics 4600 Supports DDR3 memory up to 1600 MT/s data rate Supports Intel® vPro™ Technology and Intel® Stable Image Platform Program (SIPP)</p>	X		
<p><u>Intel® Core™ i5-4590T Processor</u> Up to 3.0 GHz Max. Turbo Frequency (2.0 GHz base frequency), 6 MB cache, 4 cores, 4 threads Intel® HD Graphics 4600 Supports DDR3 memory up to 1600 MT/s data rate Supports Intel® vPro™ Technology and Intel® Stable Image Platform Program (SIPP)</p>	X		
<p><u>Intel® Core™ i5-4670 Processor</u> Up to 3.8 GHz Max. Turbo Frequency (3.4 GHz base frequency) 6 MB cache, 4 cores, 4 threads Intel HD Graphics 4600 Supports DDR3 memory up to 1600 MT/s data rate Supports Intel® vPro™ Technology and Intel® Stable Image Platform Program (SIPP)</p>	X		
<p><u>Intel® Core™ i5-4670S Processor</u> Up to 3.8 GHz Max. Turbo Frequency (3.1 GHz base frequency) 6 MB cache, 4 cores, 4 threads Intel HD Graphics 4600 Supports DDR3 memory up to 1600 MT/s data rate Supports Intel® vPro™ Technology and Intel® Stable Image Platform Program (SIPP)</p>	X		
<p><u>Intel® Core™ i5-4570 Processor</u> Up to 3.6 GHz Max. Turbo Frequency (3.2 GHz base frequency) 6 MB cache, 4 cores, 4 threads Intel HD Graphics 4600 Supports DDR3 memory up to 1600 MT/s data rate Supports Intel® vPro™ Technology and Intel® Stable Image Platform Program (SIPP)</p>	X		
<p><u>Intel® Core™ i5-4570S Processor</u> Up to 3.6 GHz Max. Turbo Frequency (2.9 GHz base frequency) 6 MB cache, 4 cores, 4 threads Intel HD Graphics 4600 Supports DDR3 memory up to 1600 MT/s data rate Supports Intel® vPro™ Technology and Intel® Stable Image Platform Program (SIPP)</p>	X		
<p><u>Intel® Core™ i5-4570T Processor</u> Up to 3.6 GHz Max. Turbo Frequency (2.9 GHz base frequency) 4 MB cache, 2 cores, 4 threads Intel HD Graphics 4600 Supports DDR3 memory up to 1600 MT/s data rate Supports Intel® vPro™ Technology and Intel® Stable Image Platform Program (SIPP)</p>	X		
<p>Intel® 4th Generation Core™ i3 Processors</p>	DM	USDT	SFF/TWR
<p><u>Intel® Core™ i3-4360 Processor</u> 3.7 GHz base frequency</p>		X	X

Standard Features and Configurable Components

4 MB cache, 2 cores, 4 threads
 Intel® HD Graphics 4600
 Supports DDR3 memory up to 1600 MT/s data rate

Intel® Core™ i3-4350 Processor

3.6 GHz base frequency
 4 MB cache, 2 cores, 4 threads
 Intel® HD Graphics 4600
 Supports DDR3 memory up to 1600 MT/s data rate

X X

Intel® Core™ i3-4350T Processor

3.1 GHz base frequency
 4 MB cache, 2 cores, 4 threads
 Intel® HD Graphics 4600
 Supports DDR3 memory up to 1600 MT/s data rate

X

Intel® Core™ i3-4340 Processor

3.6 GHz base frequency
 4 MB cache, 2 cores, 4 threads
 Intel HD Graphics 4600
 Supports DDR3 memory up to 1600 MT/s data rate

X X

Intel® Core™ i3-4330 Processor

3.5 GHz base frequency
 4 MB cache, 2 cores, 4 threads
 Intel HD Graphics 4600
 Supports DDR3 memory up to 1600 MT/s data rate

X X

Intel® Core™ i3-4330T Processor

3.0 GHz base frequency
 4 MB cache, 2 cores, 4 threads
 Intel HD Graphics 4600
 Supports DDR3 memory up to 1600 MT/s data rate

X

Intel® Core™ i3-4150 Processor

3.5 GHz base frequency
 3 MB cache, 2 cores, 4 threads
 Intel® HD Graphics 4400
 Supports DDR3 memory up to 1600 MT/s data rate

X X

Intel® Core™ i3-4150T Processor

3.0 GHz base frequency
 4 MB cache, 2 cores, 4 threads
 Intel® HD Graphics 4400
 Supports DDR3 memory up to 1600 MT/s data rate

X

Intel® Core™ i3-4130 Processor

3.4 GHz base frequency
 3 MB cache, 2 cores, 4 threads
 Intel HD Graphics 4400
 Supports DDR3 memory up to 1600 MT/s data rate

X X

Standard Features and Configurable Components

<p><u>Intel® Core™ i3-4130T Processor</u> 2.9 GHz base frequency 3 MB cache, 2 cores, 4 threads Intel HD Graphics 4400 Supports DDR3 ,memory up to 1600 MT/s Data Rate</p>	X		
<p>Intel® 4th Generation Pentium™ Processors</p>	<u>DM</u>	<u>USDT</u>	<u>SFF/TWR</u>
<p><u>Intel® Pentium G3450 Processor</u> Up to 3.4 GHz Base Frequency 3 MB cache, 2 cores, 2 threads Intel HD Graphics Supports DDR3 memory up to 1600 MT/s data rate</p>		X	X
<p><u>Intel® Pentium G3440 Processor</u> Up to 3.3 GHz Base Frequency 3 MB cache, 2 cores, 2 threads Intel HD Graphics Supports DDR3 memory up to 1600 MT/s data rate</p>		X	X
<p><u>Intel® Pentium™ G3440T Processor</u> 2.8 GHz base frequency 3 MB cache, 2 cores, 2 threads Intel® HD Graphics Supports DDR3 memory up to 1600 MT/s data rate</p>	X		
<p><u>Intel® Pentium G3430 Processor</u> 3.3 GHz base frequency 3 MB cache, 2 cores, 2 threads Intel HD Graphics Supports DDR3 memory up to 1600 MT/s data rate</p>		X	X
<p><u>Intel® Pentium G3420 Processor</u> 3.2 GHz base frequency 3 MB cache, 2 cores, 2 threads Intel HD Graphics Supports DDR3 memory up to 1600 MT/s data rate</p>		X	X
<p><u>Intel® Pentium™ G3420T Processor</u> 2.7 GHz base frequency 3 MB cache, 2 cores, 2 threads Intel HD Graphics Supports DDR3 memory up to 1600 MT/s data rate</p>	X		
<p><u>Intel® Pentium G3240 Processor</u> Up to 3.1 GHz Base Frequency 3 MB cache, 2 cores, 2 threads Intel HD Graphics Supports DDR3 memory up to 1600 MT/s data rate</p>		X	X
<p><u>Intel® Pentium™ G3240T Processor</u></p>	X		

Standard Features and Configurable Components

2.7 GHz base frequency
 3 MB cache, 2 cores, 2 threads
 Intel® HD Graphics
 Supports DDR3 memory up to 1600 MT/s data rate

Intel® Pentium™ G3220 Processor

3.0 GHz base frequency
 3 MB cache, 2 cores, 2 threads
 Intel HD Graphics
 Supports DDR3 memory up to 1333 MT/s data rate

X **X**

Intel® Pentium™ G3220T Processor

2.6 GHz base frequency
 3 MB cache, 2 cores, 2 threads
 Intel HD Graphics
 Supports DDR3 memory up to 1333 MT/s data rate

X

Intel® 4th Generation Celeron™ Processors

DM **USDT** **SFF/TWR**

Intel® Celeron™ G1840T Processor

2.5 GHz base frequency
 2 MB cache, 2 cores, 2 threads
 Intel® HD Graphics
 Supports DDR3 memory up to 1600 MT/s data rate

X

Intel® Celeron™ G1820T Processor

2.4 GHz base frequency
 2 MB cache, 2 cores, 2 threads
 Intel HD Graphics
 Supports DDR3 memory up to 1333 MT/s data rate

X

GRAPHICS

System Integrated Graphics

DM **USDT** **SFF/TWR**

Intel HD Graphics on all models (integrated on processor)

X **X** **X**

Optional Discrete Graphics Solutions

DM **USDT** **SFF/TWR**

AMD Radeon HD 7650A (MXM)

X

NOTE: When this MXM graphics card is installed in the USDT all three monitor ports are active. The discrete ATI graphics will operate the top DisplayPort while the Intel integrated graphics will operate the bottom Multi-Stream DisplayPort and the VGA output.

AMD Radeon HD 8350 (1GB) PCIe x16

X

AMD Radeon HD 8490 (1GB) PCIe x 16

X

NVIDIA NVS 310 (512 MB) PCIe x16

X

NVIDIA NVS 315 (1GB) PCIe x 16

X

NVIDIA GeForce GT630 (2 GB) FH PCIe x16

TWR only

Standard Features and Configurable Components

Adapters and Cables

	<u>DM</u>	<u>USDT</u>	<u>SFF/TWR</u>
HP DMS-59 to Dual DisplayPort Cable			X
HP DMS-59 to Dual DVI Cable			X
HP DMS-59 to Dual VGA Cable			X
HP DisplayPort to DisplayPort Cable	X	X	X
HP DisplayPort to DVI-D Adapter	X	X	X
HP DisplayPort to HDMI Adapter	X	X	X
HP DisplayPort to VGA Adapter	X	X	X
HP Serial Port Adapter			X
HP Parallel Port Adapter			X

STORAGE

Hard Disk Drives (HDD)

	<u>DM</u>	<u>USDT</u>	<u>SFF/TWR</u>
320 GB 7200 rpm HDD		X	
500 GB 7200 rpm HDD	X	X	X
500 GB 7200 rpm SED HDD	X	X	X
500 GB 10K rpm HDD			X
1 TB 7200 rpm HDD			X
1 TB 10K rpm HDD			X
2 TB 7200 rpm HDD			X

Solid State Hybrid Drives (SSHD)

	<u>DM</u>	<u>USDT</u>	<u>SFF/TWR</u>
500 GB SSHD (8 GB cache)	X	X	X
500GB SATA 6G 2.5 8G SSHD	X		
1 TB SSHD (8 GB cache)	X	X	X
1TB SATA 6G 2.5 8G SSHD	X		

Solid State Drives (SSD) & Self-encrypting Solid State Drives (SED)

	<u>DM</u>	<u>USDT</u>	<u>SFF/TWR</u>
120 GB Opal SED	X	X	X
Intel Pro 1500 120gb SSD Opal 1 SED drive SRP	X		
120GB SATA 2.5 2nd Opal1 SED SSD	X		
128 GB SSD Non-SED		X	X
128 GB Opal SED	X	X	X
128 GB M.2 PCIe SSD	X		
128GB SATA 2.5 2nd Opal2 SED SSD	X		
160 GB SSD Non-SED		X	X
180 GB Opal SED	X	X	X
Intel Pro 1500 180gb SSD Opal 1 SED drive	X		
256 GB SED		X	X
256 GB Opal SED	X	X	X

Optical Disc Drives

	<u>DM</u>	<u>USDT</u>	<u>SFF/TWR</u>
Slim DVD-ROM		X	X

Standard Features and Configurable Components

Slim BDXL Blu-ray Writer	X	X
Slim SuperMulti DVD Writer	X	X
HH Supermulti ODD		TWR only

Removable

HP Slim Removable SATA HDD Frame/Carrier	X	X
--	----------	----------

MEMORY

Form Factor	Type	Maximum	# of Slots
Desktop Mini	DDR3 non-ECC Up to 1600 MT/s	16 GB	2 SODIMM
Ultra-slim Desktop	DDR3 non-ECC Up to 1600 MT/s	16 GB	2 SODIMM
Small Form Factor	DDR3 non-ECC Up to 1600 MT/s	32 GB	4 DIMM
Tower	DDR3 non-ECC Up to 1600 MT/s	32 GB	4 DIMM

NOTE: For systems configured with more than 3 GB of memory and a 32-bit operating system, all memory may not be available due to system resource requirements. Addressing memory above 4 GB requires a 64-bit operating system.

Memory modules support data transfer rates up to 1600 MT/s; actual data rate is determined by the system's configured processor. See processor specifications for supported memory data rate.

PERFORMANCE

Intel® Smart Response Technology Disk Cache Modules	<u>DM</u>	<u>USDT</u>	<u>SFF/TWR</u>
2.5" Solid State Disk Cache			X
mSATA Solid State Disk Cache		X	

NETWORKING/COMMUNICATIONS

Ethernet (RJ-45)	<u>DM</u>	<u>USDT</u>	<u>SFF/TWR</u>
Intel I217LM Gigabit Network Connection (standard)	X	X	X
Intel Ethernet I210-T1 PCIe x1 Gb Network Interface Card (optional)			X

Wireless

Intel Centrino Advanced-N 6205 802.11 a/b/g/n PCI Express x1 Wireless Network Connection (optional)			X
Intel Centrino Advanced-N 6205 802.11 a/b/g/n PCI Express Mini Card Wireless Network Connection (optional)		X	
Intel Wireless-N 7260 802.11 M.2 a/b/g/n NIC Card Wireless Network Connection	X		
Intel Wireless-N 7260 802.11 a/b/g/n Mini PCIe NIC Card (USDT Only) Wireless Network Connection (optional)			
Intel Wireless-N 7260 802.11 a/b/g/n PCIe- Clink Card (SFF/TWR Only) Wireless Network Connection (optional)			

Standard Features and Configurable Components

NOTE: Either the integrated network connection or the Intel Centrino wireless NIC is required to support Intel vPro Technology features.

Audio/Multimedia

	<u>DM</u>	<u>USDT</u>	<u>SFF/TWR</u>
HD audio with Realtek ALC221 codec (all ports are stereo)	X	X	X
DTS Studio Sound audio management technology	X	X	X
Microphone* and headphone front ports (3.5mm)	X	X	X
Line-out and Line-In rear Ports* (3.5mm)	Line out only	X	X
Multi-streaming capable*	X	X	X
Internal speaker (standard)	X	X	X

* The front microphone port is re-taskable as a Line-in, Microphone-in or Headphone-out port. Rear audio input ports are re-taskable as a Line-in or Microphone-in port. External speakers must be powered externally. Multi-streaming can be enabled in the Realtek control panel to allow independent audio streams to be sent to/from the front and rear jacks. This allows for different audio applications to use separate audio ports on the system. For example, the front jacks could be used with a headset for a communications application while the rear jacks are being used with external speakers and a multimedia application.

KEYBOARDS AND POINTING DEVICES

Keyboard	<u>DM</u>	<u>USDT</u>	<u>SFF/TWR</u>
HP PS/2 Keyboard	X	X	X
HP USB Keyboard	X	X	X
USB Smart Card (CCID) Keyboard	X	X	X
HP USB and PS/2 Washable Keyboard	X	X	X
HP Wireless Keyboard and Mouse Combo*	X	X	X

*Keyboard contains 25% post-consumer recycled plastic material.

Mice	<u>DM</u>	<u>USDT</u>	<u>SFF/TWR</u>
HP PS/2 Mouse	X	X	X
HP USB Mouse	X	X	X
HP USB 1000dpi Laser Mouse	X	X	X
HP USB and PS/2 Washable Mouse	X	X	X

HP BIOS

Key features of the HP BIOS include:

- Deployment and manageability – HP BIOS provides several technologies that help integrate the HP EliteDesk 800 G1 Business PC into the enterprise, such as PXE, remote configuration, remote control, and F10 Setup support for 12 languages.
- Select models feature either Intel Standard Manageability or Intel Core vPro Processor Technology.
- Stability – HP BIOS supports the HP stable product roadmap by releasing only critical BIOS changes to the factory and advanced change notification.
- UEFI specification 2.1

Standard Features and Configurable Components

- Absolute Persistence agent – For tracking and tracing services, available in select countries, separate software and purchase of a subscription is required.
- Thermal and power management – The HP BIOS provides and enables thermal and power management technologies so component temperatures are managed for high reliability and to assist in operating the HP Business Desktop computer in any enterprise environment.
- Acoustic performance – Industry leading acoustic emissions across the range of operating conditions.
- Serviceability – HP BIOS provides diagnostic and detailed service information.
- Upgrades and recovery – HP BIOS provides numerous ways to upgrade HP Business Desktop computers, including BIOS updates from within DOS (DOSFlash), BIOS updates from within Windows (HPQFlash), HP Client Manager, and fail-safe recovery. In addition, the HP Business Desktop BIOS Utilities tool enables replicated BIOS setup throughout the Enterprise; it is available from within the BIOS software and from the support website.
- HP BIOS uses PKI signing of the BIOS for trusted BIOS upgrades and recovery.

Additional HP BIOS Features

- Power-On password – Helps prevent an unauthorized user from powering on the system.
- Administrator password – Also known as the setup password, this helps prevent unauthorized changes to the system configuration. If the administrator password is not known, the BIOS version cannot be changed and changes cannot be made to BIOS settings using F10 setup or under the OS.
- Advanced Configuration and Power Interface (ACPI) – Represents a significant innovation in power and configuration management, allowing operating systems and applications to manage power based on activity and usage. HP Elite models use ACPI to provide power conservation features.

S5 Max Power Savings setting supports EU Lot6 requirement and allows the computer to power down below 1W in S5 (when turned off). When S5 Max Power Savings feature is enabled power to slots is turned off along with WOL functionality.

SECURITY

	USDT/DM	SFF/TWR
Trusted Platform Module (TPM) 1.2	X	X
SATA port disablement (via BIOS)	X	X
Drive lock	X	X
RAID configurations		X
Intel® Identify Protection Technology (IPT) ¹	X	X
Serial, parallel, USB enable/disable (via BIOS)	X	X
Optional USB Port Disable at factory (user configurable via BIOS)	X	X
Removable media write/boot control	X	X
Power-On password (via BIOS)	X	X
Setup password (via BIOS)	X	X
HP Chassis (1 bay) Security Kit		TWR only
Solenoid Hood Lock / Sensor	USDT only	X
Support for chassis padlocks and cable lock devices	X	X

¹Models configured with Intel Core processors have the ability to utilize advanced security protection for online transactions. IPT, used in conjunction with participating web sites, provides double identity authentication by adding a hardware component in addition to the usual user name and password. IPT is initialized through an HP Client Security module

ENVIRONMENTAL & REGULATORY

ENERGY STAR® qualified models available

Standard Features and Configurable Components

EPEAT® registered where applicable/supported. See www.epeat.net for registration status by country.

Low halogen (chassis, all internal components and modules)

TAA compliant

PORTS

I/O Ports – Standard

	<u>DM</u>	<u>USDT</u>	<u>SFF/TWR</u>
USB 2.0	N/A	2 (front); 4 (rear)	2 (front); 4 (rear)
USB 3.0	2 (front); 4 (rear)	2 (front); 2 (rear)	2 (front); 2 (rear)
Serial (RS-232)	N/A	N/A	1
PS/2	N/A	1 keyboard (purple) 1 mouse (green)	1 keyboard (purple) 1 mouse (green)
Video	1 ea. VGA 2 ea. DisplayPort with multi-stream	1 ea. VGA 2 ea. DisplayPort with multi-stream	1 ea. VGA 2 ea. DisplayPort with multi-stream

NOTE: When configured with an Intel Celeron, Pentium or 4th generation Intel Core i3 CPU only two of the available video output ports are active

Audio	Front: headphone/mic Rear: line in/out 3.5mm diameter	Front: headphone/mic Rear: line in/out 3.5mm diameter	Front: headphone/mic Rear: line in/out 3.5mm diameter
Network Interface	RJ-45	RJ-45	RJ-45

I/O Ports – Optional

	<u>DM</u>	<u>USDT</u>	<u>SFF/TWR</u>
2nd Serial (RS-232)	N/A	N/A	1
Parallel	N/A	N/A	1

SLOTS

	<u>DM</u>	<u>USDT</u>	<u>SFF</u>	<u>TWR</u>
PCI Express Mini Card	N/A	1	N/A	N/A
MXM Graphics	N/A	1	N/A	N/A
mSATA	N/A	1	N/A	N/A
M.2	1 ea. M.2-2230 (for WLAN) 1 ea. M.2-2280 (for storage)	N/A	N/A	N/A
PCI Express x1 (v2.0)	N/A	N/A	2 ea. 2.5" low profile 6.6" length 10W max. power	2 ea. 4.2" full height 6.6" length 10W max. power
PCI Express x16 (v2.0) (wired as a x4)	N/A	N/A	1 ea. 2.5" low profile 6.6" length 35W max. power	1 ea. 4.2" full height 6.6" length 35W max. power
PCI Express x16 (v3.0)	N/A	N/A	1 ea. 2.5" low profile 6.6" length 35W max. power	1 ea. 4.2" full height 6.6" length 75W max. power

Standard Features and Configurable Components

Optional PCI (v2.3)	N/A	N/A	N/A	1 ea. 4.2" full height 6.6" length
---------------------	-----	-----	-----	--

NOTE: The TWR can support a single graphics card up to 75W. When configured with dual graphics cards support is limited to 35W for each.

BAYS

	<u>DM</u>	<u>USDT</u>	<u>SFF</u>	<u>TWR</u>
3.5" Media Card Reader	N/A	N/A	1 ea.	1 ea.
5.25" Half Height ODD	N/A	N/A	N/A	1 ea.
Slim ODD	N/A	1 ea.	1 ea.	1 ea.
Secure Digital (SD) Reader	N/A	1 ea.	N/A	N/A
2.5" internal storage drive	1 ea.	1 ea.	1 ea.	1 ea.
3.5" internal storage drive	N/A	N/A	1 ea.	2 ea.

SERVICE AND SUPPORT

On-site Warranty 1: Three-year (3-3-3) limited warranty delivers three years of on-site, next business day 2 service for parts and labor and includes free telephone support 3 24 x 7. Three-year onsite and labor are not available in all countries. Service offers terms up to 5 years by choosing a Care Pack. To choose the right level of service for your HP product, visit HP Care Pack Central: www.hp.com/go/cpc

NOTE 1: Terms and conditions may vary by country. Certain restrictions and exclusions apply. Other warranty variations may be offered in your region.

NOTE 2: On-site service may be provided pursuant to a service contract between HP and an authorized HP third-party provider, and is not available in certain countries. Global service response times are based on commercially reasonable best effort and may vary by country.

NOTE 3: Technical telephone support applies only to HP-configured and third-party HP qualified hardware and software. Toll-free calling and 24 x 7 support may not be available in some countries.

OPERATING SYSTEMS

Preinstalled	Windows 8.1 Pro (64-bit)* Windows 8.1 (64-bit)* Windows 7 Ultimate (32-bit)** Windows 7 Ultimate (64-bit)** Windows 7 Professional (32-bit)** Windows 7 Professional (64-bit)** Windows 7 Professional (32-bit) (available through downgrade rights from Windows 8.1 Pro)*** Windows 7 Professional (64-bit) (available through downgrade rights from Windows 8.1 Pro)*** Windows 7 Home Premium (32-bit)** Windows 7 Home Premium (64-bit)** FreeDOS 2.0 Novell SUSE Linux Enterprise Desktop 11
---------------------	--

For all Preinstalled operating systems HP provides Microsoft WHQL certified (where applicable) drivers on www.hp.com at the time of product announcement.

Web Support	Windows 7 Enterprise (32-bit or 64-bit) Windows 8 (64-bit) Windows 8 Pro (64-bit)* Windows 8 Enterprise (64-bit)**
--------------------	---

Standard Features and Configurable Components

For all Supported operating systems HP performs testing of the OS, and makes available all HP value add software (OS dependent). Certified drivers are made available on www.hp.com within 30 days of product announcement.

Certified Novell SUSE Linux Enterprise Desktop 11¹

For all Certified operating systems HP will submit hardware to the operating system vendor for testing and certification. All drivers would be obtained from the operating system vendor, not supplied by HP. Certification will be posted by the operating system vendor.

Test & Document Windows® Vista Enterprise (32-bit or 64-bit)
Windows® Vista Professional (32-bit or 64-bit)

For all Test & Document operating systems HP will perform functional testing of the operating system on the HP business PC platform. Any issues found will be documented in an Engineering Advisory and/or Service Advisory and posted to www.hp.com. HP will not develop or qualify any drivers or perform any integration testing.

*Not all features are available in all editions of Windows 8.1. Systems may require upgraded and/or separately purchased hardware, drivers and/or software to take full advantage of Windows 8.1 functionality. See <http://www.microsoft.com>.

**Not all features are available in all editions of Windows 7. This system may require upgraded and/or separately purchased hardware to take full advantage of Windows 7 functionality. See <http://www.microsoft.com/windows/windows-7/> for details.

***This system is preinstalled with Windows® 7 Pro software and also comes with a license and media for Windows 8.1 Pro software. You may only use one version of the Windows software at a time. Switching between versions will require you to uninstall one version and install the other version. You must back up all data (files, photos, etc.) before uninstalling and installing operating systems to avoid loss of your data.

¹The following features are not supported by Novell SUSE Linux Enterprise Desktop:

- Intel Gigabit CT Desktop NIC
- Broadcom NetXtreme Gigabit Ethernet Plus
- HP Media Card Reader
- HP Client Security
- HP Blu-ray Writer playback of commercial movies
- DisplayPort video interface
- HP 2nd serial port adapter
- Power Management features

Systems configured with Linux do not qualify for ENERGY STAR®

SOFTWARE COMPONENTS AND APPLICATIONS WITH WINDOWS

Included	Windows 7	Windows 8.1
Security	Absolute Persistence(status tracing) ¹ Device Access Manager Drive Encryption ⁴ File Sanitizer (Activated via Wizard) Disk Sanitizer (external version) ² Microsoft Security Essentials HP Client Security	Absolute Persistence(status tracing) ¹ Device Access Manager Drive Encryption ⁴ File Sanitizer (Activated via Wizard) Disk Sanitizer (external version) ² Microsoft Defender Secure Erase HP Client Security
MultiMedia	Cyberlink Power DVD, BD Cyberlink Power2Go (Secure Burn)	Cyberlink Power DVD, BD Cyberlink Power2Go (Secure Burn)
Communication		HP Wireless Hotspot

Standard Features and Configurable Components

HP Value Add	HP ePrint Driver ³ HP PageLift HP Support Assistant HP Recovery Disk Creator	HP ePrint Driver ³ HP PageLift HP Recovery Manager HP Support Assistant HP QuickStart
3rd Party	Adobe Flash Player Bing Search for Internet Explorer 10 Box Foxit PhantomPDF <i>Express</i> for HP Skype	Bing Search Foxit PhantomPDF <i>Express</i> for HP Skype
Microsoft Products	Buy Office	Buy Office

¹ Computrace agent is shipped turned off, and must be activated by customers when they purchase a subscription. Subscriptions can be purchased for terms ranging from one to five years. Service is limited, check with Absolute for availability outside the U.S.

² Available via download

³ Requires an Internet connection to HP web-enabled printer and HP ePrint account registration (for a list of eligible printers, supported documents and image types and other HP ePrint details, see www.hp.com/go/eprintcenter). Requires optional broadband module. Broadband use requires separately purchased service contract. Check with service provider for coverage and availability in your area. Separately purchased data plans or usage fees may apply. Print times and connection speeds may vary

⁴ Drive Encryption is planned to be available in October 2013. Requires Windows. Data is protected prior to Drive Encryption login. Turning the PC off or into hibernate logs out of Drive Encryption and prevents data access.

Technical Specifications – Core vPro Processors

INTEL 4th GENERATION CORE vPRO PROCESSORS

All HP EliteDesk 800 G1 Business PC models featuring this technology include processors that are part of the Intel 2013 Stable Image Platform Program (SIPP) designed to ensure the stability promise inherent in the value proposition of the HP EliteDesk 800 G1 Business PC, thus making these models the most stable, secure, and manageable platforms available to enterprises today.

Intel® Advanced Management Technology (AMT) v9.0 – An advanced set of remote management features and functionality which provides network administrators the latest and most effective tools to remotely discover, heal, and protect networked client systems regardless of the system's health or power state. AMT 9.0 includes the following advanced management functions:

- Power Management (on, off, reset)
- Hardware Inventory (includes BIOS and firmware revisions)
- Hardware Alerting
- Agent Presence
- System Defense Filters
- SOL/IDER
- Cisco NAC/SDN Support
- ME Wake-on-LAN
- DASH 1.1 compliance
- IPv6 Support
- Fast Call for Help - a client inside or outside the firewall may initiate a call for help via BIOS screen, periodic connections, or alert triggered connection
- Remote Scheduled Maintenance - pre-schedule when the PC connects to the IT or service provider console for maintenance. Remote PCs can get required patches, be inventoried, etc by connecting to their IT console or Service Provider when it's convenient.
- Remote Alerts - automatically alert IT or service provider if issues arise
- Access Monitor - Provides oversight into Intel® AMT actions to support security requirements
- PC Alarm Clock
- Microsoft NAP Support
- Host Base set-up and configuration
- Management Engine (ME) firmware roll back
- Wireless AMT functionality on Desktop (WoDT)
- Enhanced KVM resolution

Technical Specifications - Graphics

Intel HD Graphics		
VGA Controller	Integrated	
DisplayPort	Multimode capable; supports HDCP, Display Port Audio (2 streams), HBR2 link rates and Multi-Stream Technology for a maximum of 3 displays (including the integrated panel)	
Bus Type	N/A	
RAMDAC	N/A	
Memory	<p>Intel graphics do not have dedicated memory but utilizes some of the computer's system memory. The amount of memory used for graphics depends on the amount of system memory installed, BIOS settings, operating system, and system load. 32 MB is pre-allocated for graphics use at system boot time. Additional memory can be allocated at boot time by the BIOS for PAVP (Protected Audio Video Playback) support for playback of protected video content.</p> <p>Additional memory is allocated for graphics as needed using Intel's Dynamic Video Memory Technology (DVMT), to provide an optimal balance between graphics and system memory use.</p>	
Maximum Graphics Memory	Microsoft Windows 7	Windows 8.1
	Up to 1.7GB	Up to 1.8GB
	Note: the actual amount of maximum graphics memory can be less than the amounts listed above depending upon your computer's configuration.	
Maximum Color Depth	32 bits/pixel	
Graphics/Video API Support	<p>4th Generation Core processors:</p> <ul style="list-style-type: none"> • The Processor Graphics contains a refresh of the seventh generation graphics core enabling substantial gains in performance and lower power consumption. Up to 16 EU support. • Next Generation Intel Clear Video Technology HD Support is a collection of video playback and enhancement features that improve the end user's viewing experience <ul style="list-style-type: none"> ○ Encode/transcode HD content ○ Playback of high definition content including Blu-ray Disc ○ Superior image quality with sharper, more colorful images • DirectX Video Acceleration (DXVA) support for accelerating video processing <ul style="list-style-type: none"> ○ Full AVC/VC1/MPEG2 HW Decode • Advanced Scheduler 2.0, 1.0 • Windows 7, Windows 8, Linux OS Support • DirectX 11.1 • OpenGL 4.0 • Open CL 1.2 	
Supported Display Resolutions and Refresh Rates		
Note: other resolutions may be available but are not recommended as they may not have been tested and qualified by HP		
	Resolution	Refresh Rates
	800x600	60 Hz
	1024x768	60 Hz
	1152x864	60 Hz
	1280x600	60 Hz

Technical Specifications - Graphics

	1280x720	60 Hz
	1280x800	60 Hz
	1280x960	60 Hz
	1280x1024	60 Hz
	1360x768	60 Hz
	1366x768	60 Hz
	1400x1050	60 Hz
	1440x900	60 Hz
	1600x900	60 Hz
	1600x1200*	60 Hz
	1680x1050	60 Hz
	1920x1080	60 Hz
	1920x1200*	60 Hz
	1920x1440*	60 Hz
	2560x1440*	60 Hz
	2560x1600*	60 Hz
	3840x2160*	60 Hz

* Only supported on displays connected to the external DisplayPort connector.

AMD Radeon HD 7650A Graphics Card

Form Factor	MXM 3.0
Graphics Controller	AMD Radeon HD 7650A
Core Clock	600MHz
Memory Clock	800MHz
Memory	2GB, DDR3, 128-bit wide
Bus Type	MXM
Max. Power	35W
Power Source Support	12V and 19V
3D API Support	DX11, SMS
HDCP Support	Yes
Display Max. Resolution	Digital 2560 x 1600 Analog 2048 x 1536
Supported Graphics APIs	DX11, OpenGL, full 1080p BD (H264) playback in hardware, Multi-Stream DisplayPort support

Supported Display Resolutions and Refresh Rates

Note: other resolutions may be available but are not recommended as they may not have been tested and qualified by HP

Resolution	Refresh Rates
------------	---------------

Technical Specifications - Graphics

800 x 600	60 Hz
1024 x 768	60 Hz
1280 x 720	60 Hz
1280 x 768	60 Hz
1280 x 1024	60 Hz
1360 x 768	60 Hz
1440 x 900	60 Hz
1600 x 900	60 Hz
1680 x 1050	60 Hz
1920 x 1080	60 Hz

NVIDIA NVS 310 Graphics Card

Introduction	<p>The NVIDIA® NVS™ 310 Graphics Card is a PCI Express low profile form factor graphics add-in card targeted as an active low cost graphics solution for the corporate business and enterprise markets.</p> <p>The NVIDIA® NVS 310 graphics card is an ideal solution for customers requiring a small form factor graphics add-in card for either standard or small form factor PC designs.</p>	
Performance and Features	<p>The NVIDIA® NVS 310 Graphics Card offers 512 MB of ultrafast DDR3 memory and is capable of supporting up to 2 displays.</p> <p>DisplayPort connector supports multimode technology to support connection to DVI-D, VGA and HDMI monitors with optional adapters in kits NR078AA, FH973AT, BP937AA, AS615AA.</p> <p>For a DisplayPort to DisplayPort connections use the optional DisplayPort Cable Kit VN567AA.</p>	
Form Factor	Low Profile: 2.713 × 6.15 in	
Graphics Controller	NVIDIA® NVS 310	
Memory Clock	875MHz	
Memory Size	512 MB DDR3	
Memory Bandwidth	14 GB/s	
Max. Power	19.5W	
Display Max. Resolution	Up to 2560 × 1600 (digital display) per display	
Display Output	Up to 2 displays in the following configurations	
	DisplayPort output:	<ul style="list-style-type: none"> • Drives two DisplayPort enabled digital display at resolutions up to 2560 × 1600 at 60 Hz with reduced blanking, when connected natively using the 2 DisplayPort connectors on the NVS 310 graphics card • Supports 2 monitors up to resolution of 1920 × 1200 at 60 Hz with reduced blanking using DisplayPort Multi-Stream topology technology.

Technical Specifications - Graphics

	DVI-D output:	<ul style="list-style-type: none"> • Drives two digital display at resolutions up to 1920 × 1200 at 60 Hz with reduced blanking using DisplayPort to DVI-D single-link cable adaptors • Drives two digital display at resolutions up to 2560 × 1600 at 60 Hz with reduced blanking using DisplayPort to DVI-D dual-link cable adaptors
	HDMI output:	<ul style="list-style-type: none"> • NVS 310 is capable of driving two high definition (HD) panels up to resolutions of 1920 × 1080P at 60 Hz using DisplayPort to HDMI cable adaptors
	VGA display output:	<ul style="list-style-type: none"> • Drives two analog display at resolutions up to 1920 × 1200 at 60 Hz using DisplayPort to VGA cable adaptors

Supported Display Resolutions and Refresh Rates

Note: other resolutions may be available but are not recommended as they may not have been tested and qualified by HP

Resolution	Maximum Refresh Rates (Hz) by Connection			
	DisplayPort to VGA	DisplayPort to DVI-D	DisplayPort to HDMI	DisplayPort
640 x 480	85	60	60	60
800 x 600	85	60	60	60
1024 x 768	85	60	60	60
1280 x 720	85	60	60	60
1280 x 1024	85	60	60	60
1440 x 900	75	60	60	60
1600 x 1200	60	60	60	60
1680 x 1050	60	60	60	60
1920 x 1080	60-R	60-R	60	60
1920 x 1200	60-R	60-R		60
1920 x 1440				60
2048 x 1536				60
2560 x 1600				60

Technical Specifications - Graphics

NVIDIA GeForce GT630 Graphics Card		
Introduction	<p>The NVIDIA GeForce GT630 DP (2GB) PCIe x16 Card Graphics Card provides a full height, PCI Express x16 graphics add-in card solution based on the NVIDIA Kepler Architecture GPU. The card is designed to support three display connections through its DVII, and two DisplayPort connectors.</p> <p>An ideal solution for desktop PC customers seeking enhanced 2D and advanced 3D graphics performance, the NVIDIA GeForce GT630 DP (2GB) PCIe x16 Cards are an excellent choice for business users who want run multiple displays from a single graphics board. Engage in Web conferencing or video or photo editing, while improving your everyday business PC experience with better graphics and excellent visual display quality.</p>	
Performance and Features	<p>The NVIDIA GeForce GT630 DP (2GB) PCIe x16 Cards deliver superior PCI Express (PCIe) Gen 3 features including:</p> <ul style="list-style-type: none"> • Unprecedented flexibility for new applications and enhanced performance • Support for NVIDIA surround technology • Run multiple displays from a single graphics card • Full 16 lane PCIe Generation 3 bus support with peak bandwidth support • Wireless Display ready for future support 	
Form Factor	PCIe x16 Card	
Graphics Controller	NVIDIA Kepler Architecture GPU	
Core Clock	875 MHz	
Memory Clock	891 MHz	
Memory Size	2 GB DDR3 128 bit	
Memory Bandwidth	28.5 GB/s	
Display Max. Resolution	2560 x 1600 digital, 2048 x 1536 analog	
Display Support	Integrated 400 MHz RAMDAC	
Supported Display Resolutions and Refresh Rates		
Note: other resolutions may be available but are not recommended as they may not have been tested and qualified by HP		
Resolution	Maximum Refresh Rates (Hz)	
	Analog Connection	Digital Connection
640 x 480	85	60
800 x 600	85	60
1024 x 768	85	60
1280 x 720	85	60
1280 x 1024	85	60
1440 x 900	75	60
1600 x 1200	85	60

Technical Specifications - Graphics

1680 x 1050	75	60
1920 x 1080	85	60-R
1920 x 1200	85	60-R
1920 x 1440	85	60
2048 x 1536	75	60
2560 x 1600	N/A	60

NVIDIA NVS 315 1GB PCIe x 16 Graphics Card

Introduction	Get efficient dual-display graphics performance in a PCI Express low-profile graphics card with the NVIDIA NVS 315 PCIe x16 1 GB Graphics Card, an ideal desktop graphics solution for professional business and commercial applications.
Performance and Features	<p>The NVIDIA® NVS 315 Graphics Card offers 1 GB of ultrafast DDR3 memory and is capable of supporting up to 2 displays.</p> <p>DisplayPort connector supports multimode technology to support connection to DVI-D, VGA and HDMI monitors with optional adapters in kits NR078AA, FH973AT, BP937AA, AS615AA.</p> <p>For a DisplayPort to DisplayPort connections use the optional DisplayPort Cable Kit VN567AA.</p>
Form Factor	Low Profile: 2.713 × 6.15 in
Graphics Controller	NVIDIA® NVS 315
Memory Clock	875MHz
Memory Size	512 MB DDR3
Memory Bandwidth	14 GB/s
Connectors	DMS-59 , with support for dual VGA, dual DVI or dual Display Port with the appropriate adapter cable
Display Max. Resolution	Up to 2048 x 1536 VGA; 1920 x 1200 DVI; 2560 x 1600 DisplayPort
Display Output	Up to 2 displays in the following configurations
	<ul style="list-style-type: none"> • Dual DVI : <ul style="list-style-type: none"> ○ Drives two DVI displays using optional HP DMS59 DVI Dual-head Connector Cable DL139A • Dual DisplayPort : <ul style="list-style-type: none"> ○ Drives two DisplayPort using optional HP DMS-59 to Dual DisplayPort kit XP688AA • Dual VGA : <ul style="list-style-type: none"> ○ Drives two analog using the included HP DMS-59 to Dual VGA Cable
Supported Display Resolutions and Refresh Rates	
Note: other resolutions may be available but are not recommended as they may not have been tested and qualified by HP	

Technical Specifications - Graphics

Resolution	Maximum Refresh Rates (Hz) by Connection	
	Analog Connection	Digital Connection
640 x 480	85	60
720 x 480	85	60
720 x 576	85	60
800 x 600	85	60
1024 x 768	85	60
1280 x 720	85	60
1280 x 768	85	60
1280 x 1024	85	60
1440 x 900	75	60
1600 x 1024	85	60
1600 x 1200	85	60
1680 x 1050	75	60
1920 x 1080	85	60-R
1920 x 1200	85	60-R
1920 x 1440	85	N/A
2048 x 1536	75	N/A
2560 x 1440	N/A	60*
2560 x 1600	N/A	60*
		* Display Port Only

AMD Radeon HD 8350 1GB PCIe x16 DH Graphics Card

Introduction	Get stable 2D and advanced 3D graphics performance from the AMD Radeon HD 8350 1 GB PCIe x16 DH Graphics Card, a low profile, PCI Express x16 graphics add-in card based on the AMD Radeon HD 8350 GPU, great for Web conferencing or video and photo editing.
Form Factor	PCIe x16
Graphics Controller	AMD Radeon HD 8350
Core Clock	GPU engine operates at 523 MHz
Memory	1GB, DDR3, SDRAM
Memory Clock	875 MHz
HDCP Support	Yes
Display Max. Resolution	Digital 1920 x 1200 Analog 2048 x 1536

Technical Specifications - Graphics

Supported Display Resolutions and Refresh Rates

Note: other resolutions may be available but are not recommended as they may not have been tested and qualified by HP

	Analog Connection	Digital Connection
640 x 480	85	60
720 x 480	85	60
720 x 576	85	60
800 x 600	85	60
1024 x 768	85	60
1280 x 720	85	60
1280 x 768	85	60
1280 x 1024	85	60
1440 x 900	75	75
1600 x 1024	85	60
1600 x 1200	85	60
1680 x 1050	75	75-R
1920 x 1080	85	60-R
1920 x 1200	85	60-R
1920 x 1440	85	N/A
2048 x 1536	75	N/A
2560 x 1440	N/A	N/A
2560 x 1600	N/A	N/A

AMD Radeon HD 8490 1GB PCIe x16 Graphics Card

Introduction	Get impressive graphics and high resolution dual-display performance in a low profile, PCI Express x16 graphics add-in card based on the AMD Radeon HD 8490 Graphics Processor. Improve your everyday PC, Web conferencing, and video or photo editing.
Form Factor	PCIe x16
Graphics Controller	AMD Radeon HD 8490
Core Clock	GPU engine operates at 875 MHz
Memory	1GB, DDR3, SDRAM
Memory Clock	900 MHz
HDCP Support	Yes
Display Max. Resolution	Digital 2560 x 1600 Analog 2048 x 1536

Technical Specifications - Graphics

Supported Display Resolutions and Refresh Rates

Note: other resolutions may be available but are not recommended as they may not have been tested and qualified by HP

	Analog Connection	Digital Connection
300 x 200	85	60
320 x 240	85	60
400 x 300	85	60
640 x 480	85	60
720 x 480	85	60
720 x 576	85	60
800 x 600	85	60
1024 x 768	85	60
1280 x 720	85	60
1280 x 768	85	60
1280 x 1024	85	60
1440 x 900	75	75
1600 x 900	85	60
1600 x 1024	85	60
1600 x 1200	85	60
1680 x 1050	75	75-R
1920 x 1080	85	60-R
1920 x 1200	85	60-R
1920 x 1440	85	N/A
2048 x 1536	75	N/A
2560 x 1440	N/A	60
2560 x 1600	N/A	60

Technical Specifications – Hard Disk and Solid State Storage

Introduction:

HP Serial Advanced Technology Attachment (SATA) Hard Drives maximize the performance of HP Business PCs by providing the technologies to meet your increasing storage demands with high-capacity drives offering superior reliability and performance.

SATA provides faster data transfer speeds, better system cooling airflow, more bandwidth, more headroom for speed increases in future generations and better data integrity. A next-generation technology, the SATA interface connects hard drives to the PC platform enabling easy aggregation of multiple hard drives into a single PC. This offers you the additional benefits of dedicated bandwidth, the ability to more easily identify device failures and scalability. The HP EliteDesk 800 G1 Series Business PC supports the latest SATA 6.0Gb/s specification.

HP Drive Lock

HP Serial ATA Hard Drives offer enhanced security via a new Drive Lock. When enabled, this ATA security feature set prevents software access to user data on the drive until one or two user-defined passwords are provided.

SMART IV Technology

Self-Monitoring Analysis and Reporting Technology (SMART) hard drive technology allows hard drives to monitor their own health and to raise flags if imminent failures are predicted. If the drive determines that a failure is imminent, the SMART hard drive technology enables the intelligent manageability or management software to generate a fault alert. While the current versions of SMART hard drives do a good job monitoring the data on the hard drive media, the ever increasing emphasis on reliability and quality has promoted HP to implement SMART IV technology which constantly checks that the data flow from host interface to media and media to host interface is not compromised. This is accomplished by inserting a 2 byte parity code into every 512 byte block in the data path of the hard drive's Cache RAM. This unique parity checking performed by HP's SMART IV technology hard drives, allows for more complete error detection coverage encompassing the entire data path between the host and the hard drive.

Smart IV is also known as IOEDC: I/O Error Detection Code.

Native Command Queuing

NCQ or Native Command Queuing is a SATA protocol extension that allows the hard drive to have several write or read commands outstanding at the same time. In contrast, normal non-queued operation requires each command to be completed before the next command is issued by the host system. Queuing allows the drive to complete the commands in the order that allows for best overall throughput. It also involves an advanced method of transferring data to or from the host, called First Party Direct Memory Access (FPDMA), which allows the hard drive and the host controller to manage the data transfers for multiple outstanding commands, without involving the host processor. NCQ can contribute to better performance but the results are dependent on many factors, including the access patterns of the various applications and operating system functions that are initiating drive accesses. Enabling NCQ features in the hard drive requires AHCI support from the host system BIOS, controller, and driver. AHCI support is typically implemented in RAID configurations.

Note: GB = 1 billion bytes. Actual available capacity is less.

Redundant Array of Independent Drives (RAID)

Flexible implementation:

- DriveLock is supported while in RAID mode. Users can manage the DriveLock password from within F10 Setup. Locked drives will be displayed as such in the RAID option ROM interface.
- Hard drive information can be viewed within F10 Setup while in RAID mode. Previously, the hard drives will not appear in Drive Configuration when switching to RAID mode.
- DPS Self-Test can be executed on physical hard drives while in RAID mode.

Technical Specifications – Hard Disk and Solid State Storage

- The RAID Setup Utility (accessed through CTRL-I) can be protected by the F10 Setup password.

NOTE:

RAID 1 is the only RAID configuration offered via factory configurations. The pre-configured systems:

- Are only available on the SFF and TWR form factors. The USDT and DM form factors do not support RAID as they do not allow for multiple common storage drives.
- Are complete RAID systems and have both drives installed. If the TWR is configured with three hard disk drives, the third drive is would be un-partitioned and not part of the RAID array
- Have the necessary Option ROM configuration.
- Are pre-loaded and pre-installed with all required Intel software.
- Include a preinstalled operating system that is mirrored mode out of the box.

HP 1TB 10K rpm SATA 6.0Gb/s 3.5” Hard Disk Drive		
Unformatted Capacity	1 TB	
Rotational Speed	10,000 rpm	
Interface	Serial ATA (6.0 Gb/s)	
Synchronous Transfer Rate (Maximum)	Up to 600 MB/s	
Buffer Size	64 MB	
Cache	Adaptive	
Seek Time (typical reads, includes controller overhead, including settling)	Single Track:	1.2 ms
	Average:	3.6 ms
	Full-Stroke:	9.0 ms
Height (nominal)	0.6 in/1.53 mm	
Width (nominal)	Media diameter: 2.5 in/63.6 mm	
	Physical size: 2.75 in/69.9 mm	
Operating Temperature	41° to 131° F (5° to 55° C)	

HP 500 GB 10K rpm SATA 6.0Gb/s 3.5” Hard Disk Drive	
Unformatted Capacity	500 GB
Rotational Speed	10,000 rpm

Technical Specifications – Hard Disk and Solid State Storage

Interface	Serial ATA (6.0 Gb/s)	
Synchronous Transfer Rate (Maximum)	Up to 600 MB/s	
Buffer Size	64 MB	
Cache	Adaptive	
Seek Time (typical reads, includes controller overhead, including settling)	Single Track:	1.2 ms
	Average:	3.6 ms
	Full-Stroke:	9.0 ms
Height (nominal)	0.6 in/1.53 mm	
Width (nominal)	Media diameter: 2.5 in/63.6 mm	
	Physical size: 2.75 in/69.9 mm	
Operating Temperature	41° to 131° F (5° to 55° C)	

HP 320-GB 7.2K SATA 6.0Gb/s 2.5” Hard Disk Drive		
Capacity	320,072,933,376 bytes	
Rotational Speed	7,200 rpm	
Interface	Serial ATA 2.0 (6.0 Gb/s)	
Buffer Size	16 MB	
Logical Blocks	488,397,168	
Seek Time (typical reads, includes controller overhead, including settling)	Single Track:	2.0 ms
	Average:	12 ms
	Full-Stroke:	22 ms
Height (nominal)	0.374 in/9.5 mm	
Width (nominal)	Media diameter: 2.5 in/63.5 mm	
	Physical size: 2.75 in/70 mm	
Operating Temperature	41° to 131° F (5° to 55° C)	

Technical Specifications – Hard Disk and Solid State Storage

HP 500-GB 7200 RPM SATA 2.5” Self-Encrypting (SED) Hard Disk Drive		
Capacity	500,107,862,016 bytes	
Rotational Speed	7,200 rpm	
Drive Type	Self-Encrypting Drive (SED) with SATA interface	
Interface	SATA Interface conforming to Serial ATA International Organization: Serial ATA Revision 2.6	
Segmented Buffer with write cache	32768 KB - A portion of buffer capacity used for firmware	
Number of Sectors	976,773,168	
Seek Time (typical reads)	Single Track:	1.0 ms
	Average:	13 ms
	Full-Stroke:	25 ms
Media Diameter	2.5 in/63.5 mm	
Height	0.267 in/6.8 mm, ±0.2mm	
Width	2.75 in/69.85 mm, ±0.25mm	
Length	3.945 in/100.2 mm, ±0.25mm	
Weight	3.35 oz/95 g (max)	
Operating Temperature	32° to 140° F (0° to 60° C)	

HP 500-GB 7.2K SATA 6.0Gb/s 2.5” Hard Disk Drive		
Capacity	500,107,862,016 bytes	
Rotational Speed	7,200 rpm	
Interface	Serial ATA 2.0 (6.0 Gb/s)	
Buffer Size	16 MB	
Logical Blocks	976,773,168	
Seek Time (typical reads, includes controller overhead, including settling)	Single Track:	2.0 ms
	Average:	12 ms
	Full-Stroke:	25 ms

Technical Specifications – Hard Disk and Solid State Storage

Height (nominal)	0.374 in/9.5 mm
Width (nominal)	Media diameter: 2.5 in/63.5 mm
	Physical size: 2.75 in/70 mm
Operating Temperature	41° to 131° F (5° to 55° C)

HP 1-TB SATA 6G 2.5" 8GB Solid State Hybrid Drive (SSHD)

Formatted Capacity	1 TB	
Spindle Speed	5,400 rpm +/- 0.2%	
Drive Type	Solid State Hybrid Drive (SSHD) technology with NAND Flash	
Interface	Serial ATA (SATA)	
Cache Buffer	64 MB	
NAND Flash Commercial Multilevel Cell (cMLC)	8 GB	
Number of Sectors	976,773,168	
Seek Time (typical reads)	Single Track:	2.0 ms
	Average:	12 ms
Height	0.374 +/- .008 in (9.5 +/- 0.2 mm)	
Width	2.750 +/- 0.010 in (69.85 +/- 0.25 mm)	
Length	3.951 +0.008 / -0.010 in (100.35 +0.20 / -0.25 mm)	
Weight	0.254 lb/115 g (max)	
Operating Temperature	32° to 140° F (0° to 60° C)	

HP 500 GB SATA 6G 2.5" 8GB Solid State Hybrid Drive (SSHD)

Formatted Capacity	500 GB	
Spindle Speed	5,400 rpm +/- 0.2%	
Drive Type	Solid State Hybrid Drive (SSHD) technology with NAND Flash	
Interface	Serial ATA (SATA)	

Technical Specifications – Hard Disk and Solid State Storage

Cache Buffer	64 MB	
NAND Flash Commercial Multilevel Cell (cMLC)	8 GB	
Number of Sectors	976,773,168	
Seek Time (typical reads)	Single Track:	2.0 ms
	Average:	12 ms
Height	0.268 +/- .008 in (6.8 +/- 0.2 mm)	
Width	2.750 +/- 0.010 in (69.85 +/- 0.25 mm)	
Length	3.951 +0.008 / -0.010 in (100.35 +0.20 / -0.25 mm)	
Weight	0.209 lb/95 g (max)	
Operating Temperature	32° to 140° F (0° to 60° C)	

HP 500-GB 7.2K rpm SATA 6.0Gb/s 3.5" Hard Disk Drive		
Capacity	500,107,862,016 bytes	
Rotational Speed	7,200 rpm	
Interface	Serial ATA 3.0 (6.0 Gb/s)	
Buffer Size	16 MB	
Logical Blocks	976,773,168	
Seek Time (typical reads, includes controller overhead, including settling)	Single Track:	2.0 ms
	Average:	11 ms
	Full-Stroke:	21 ms
Height (nominal)	1 in/2.54 cm	
Width (nominal)	Media diameter: 3.5 in/8.89 cm	
	Physical size: 4 in/10.2 cm	
Operating Temperature	41° to 131° F (5° to 55° C)	

Technical Specifications – Hard Disk and Solid State Storage

HP 120 GB Solid State Drive		
Unformatted Capacity	120 GB	
Architecture	Multi Level Cell (MLC) NAND Flash with wear leveling 10 channel controller	
Interface	Serial ATA 2.0 (3.0 Gb/s)	
Dimensions (W x H x D)	2.74 x 0.37 x 4 in (6.98 x 0.95 x 10.2 cm)	
Weight	0.18 lb (80 g)	
Bandwidth Performance	Sustained Sequential Read:	Up to 250 MB/s
	Sustained Sequential Write:	Up to 70 MB/s
	Random Read:	Up to 35K IOPs
	Random Write:	Up to 6.6K IOPs
Latency	Read:	65-ms
	Write:	85-ms
Power	DC power requirement:	5 VDC 5%-100 mV ripple p-p
	Total power consumption:	0.15W (active); 0.075W (idle)
Useful Drive Life	35TB written, up to 20GB/day for 5 years	
Environmental (all conditions, non-condensing)	Operating Temperature:	32° to 158° F (0° to 70° C)
	Relative Humidity:	5% to 95%
	Maximum Wet Bulb Temperature (operating):	84° F (29° C)
	Shock:	1,500 G/0.5-ms
<p>* For solid state disk drives, GB means 1 billion bytes. 128GB is the unformatted capacity of this drive before a portion of the drive is reserved for flash management features. Actual capacity will vary by content</p> <p>** The product achieves a mean time between failure (MTBF) based on population statistics not relevant to individual units.</p>		

HP 128 GB Solid State Drive	
Unformatted Capacity	128 GB*
Architecture	Multi Level Cell (MLC) NAND
Interface	SATA 6 GB/sec

Technical Specifications – Hard Disk and Solid State Storage

Dimensions (W x H x D)	2.75 x 0.276 x 3.96 in (6.985 x 0.7 x 10.05 cm)	
Weight	0.16 lb (73 g)	
Bandwidth Performance	Sustained Sequential Read:	Up to 450 MB/ss
	Sustained Sequential Write:	Up to 260 MB/s
	Random Read (4KB):	up to 46K IOPs
	Random Write (4KB):	up to 56K IOPs
Latency	Read:	55ms (TYP)
	Write:	55ms (TYP)
Power	DC power requirement:	Min 4.5 V; Max 5.5 V
	Total power consumption:	160 mW (Active) ; <85 mW; (Idle)
Useful Drive Life	1.2 million device hours**	
Environmental (all conditions, non-condensing)	Operating Temperature:	32° to 158° F (0° to 70° C)
	Relative Humidity (operating):	5% to 95%
	Shock:	1,500 G/1.0 msec
Regulations	UL, CSA, EN 60950-2000, CISPR Pub 22 Class B, CNS 13438, AS/NZS CISPR 22:2002 Class B, Korea KCC, CE Mark	
<p>* For solid state disk drives, GB means 1 billion bytes. 128GB is the unformatted capacity of this drive before a portion of the drive is reserved for flash management features. Actual capacity will vary by content</p> <p>** The product achieves a mean time between failure (MTBF) based on population statistics not relevant to individual units.</p>		

HP 160 GB Solid State Drive

Unformatted Capacity	160 GB*	
Architecture	Multi Level Cell (MLC) NAND	
Interface	SATA 3 GB/sec	
Dimensions (W x H x D)	2.74 x 0.37 x 4 in (6.98 x 0.95 x 10.2 cm)	
Weight	0.18 lb (80 g)	
Bandwidth Performance	Sustained Sequential Read:	Up to 250 MB/s
	Sustained Sequential Write:	Up to 70 MB/s
	Random Read (4KB):	up to 35K IOPs

Technical Specifications – Hard Disk and Solid State Storage

	Random Write (4KB):	up to 6.6K IOPs
Latency	Read:	65 ms
	Write:	85 ms
Power	DC power requirement:	5 VDC 5%-100 mV ripple p-p
	Total power consumption:	0.15 Watt (Active); 0.075 Watt (Idle)
Useful Drive Life	35TB written, up to 20GB/day for 5 years **	
Environmental (all conditions, non-condensing)	Operating Temperature:	32° to 158° F (0° to 70° C)
	Relative Humidity (operating):	5% to 95%
	Shock:	1,500 G/0.5 msec
Regulations	UL, CSA, EN 60950-2000, CISPR Pub 22 Class B, CNS 13438, AS/NZS CISPR 22:2002 Class B, Korea KCC, CE Mark	
* For solid state disk drives, GB means 1 billion bytes. 128GB is the unformatted capacity of this drive before a portion of the drive is reserved for flash management features. Actual capacity will vary by content		
** The product achieves a mean time between failure (MTBF) based on population statistics not relevant to individual units.		

HP 256 GB SATA 2.5” Self-Encrypting (SED) Solid State Drive

Unformatted Capacity	256,186,209,271 bytes	
Architecture	Self-Encrypting (SED) Solid State Drive with 25nm MLC NAND Flash and SATA interface	
Interface	Serial ATA 2.0 (3.0 Gb/s)	
NAND Flash	25nm MLC NAND Flash	
Height	.275 in/7mm	
Width	2.75 in/69.85 mm	
Length	3.95 in/100.5 mm	
Weight	0.161 lb (73 g)	
Bandwidth Performance	Sustained Sequential 128k Read:	Up to 450 MB/s
	Sustained Sequential 128k Write:	Up to 260 MB/s
	Random 4k Read:	Up to 46K IOPs
	Random 4k Write:	Up to 56K IOPs
Latency	Read:	55 µs

Technical Specifications – Hard Disk and Solid State Storage

	Write:	55 μ s
Power	SATA power consumption:	160 mW (active average); <85 mW (idle average)
Useful Drive Life	72TB written, up to 40GB/day for 5 years	
Environmental (all conditions, non-condensing)	Operating Temperature:	32° to 158° F (0° to 70° C)
	Relative Humidity:	5% to 95%
	Shock:	1,500 G/1 ms

HP 500-GB 7.2K rpm SATA 6.0Gb/s 3.5” Hard Disk Drive

Capacity	500,107,862,016 bytes	
Rotational Speed	7,200 rpm	
Interface	Serial ATA 3.0 (6.0 Gb/s)	
Buffer Size	16 MB	
Logical Blocks	976,773,168	
Seek Time (typical reads, includes controller overhead, including settling)	Single Track:	2.0 ms
	Average:	11 ms
	Full-Stroke:	21 ms
Height (nominal)	1 in/2.54 cm	
Width (nominal)	Media diameter: 3.5 in/8.89 cm	
	Physical size: 4 in/10.2 cm	
Operating Temperature	41° to 131° F (5° to 55° C)	

HP 1-TB 7.2K rpm SATA 6.0Gb/s 3.5” Hard Disk Drive

Capacity	1,000,204,886,016 bytes	
Rotational Speed	7,200 rpm	
Interface	Serial ATA 3.0 (6.0 Gb/s)	
Buffer Size	16 MB	

Technical Specifications – Hard Disk and Solid State Storage

Logical Blocks	1,953,525,168	
Seek Time (typical reads, includes controller overhead, including settling)	Single Track:	2.0 ms
	Average:	11 ms
	Full-Stroke:	21 ms
Height (nominal)	1 in/2.54 cm	
Width (nominal)	Media diameter: 3.5 in/8.89 cm	
	Physical size: 4 in/10.2 cm	
Operating Temperature	41° to 131° F (5° to 55° C)	

HP 2-TB 7.2K rpm SATA 6.0Gb/s 3.5” Hard Disk Drive

Unformatted Capacity	2 TB	
Rotational Speed	7,200 rpm	
Interface	SATA 6Gb/s NCQ	
Cache, Multisegmented (MB)	64 MB	
Seek Time (average)	Read	<8.5 ms
	Write	<9.5 ms
Height	1.028 in/26.11 mm	
Width	4.0 in/101.6 mm	
Depth	5.787 in/146.99 mm	
Weight	1.38 lb/626 g	
Operating Temperature	32° to 140° F (0° to 60° C)	

Technical Specifications – Memory

HP Slim SuperMulti DVD Writer Drive		
Height	12.7mm height	
Orientation	Either horizontal or vertical	
Interface type	SATA/ATAPI	
Disc recording capacity	Up to 8.5 GB DL or 4.7 GB standard	
Dimensions (W x H x D)	5.04 x 0.5 x 5.0 in (128 x 12.7 x 127 mm) without bezel	
Weight (max)	0.42 lb (190 g)	
Write speeds	DVD-RAM	Up to 5X
	DVD-R DL	Up to 6X
	DVD+R	Up to 8X
	DVD+RW	Up to 8X
	DVD+R DL	Up to 6X
	DVD-R	Up to 8X
	DVD-RW	Up to 6X
	CD-R	Up to 24X
	CD-RW	Up to 24X
Read speeds	DVD-RAM	Up to 5X
	DVD-RW, DVD+RW	Up to 8X
	DVD-R DL, DVD+R DL	Up to 8X
	DVD+R, DVD-R	Up to 8X
	DVD-ROM DL, DVD-ROM	Up to 8X
	CD-ROM, CD-R	Up to 24X
	CD-RW	Up to 24X
Access time (typical reads, including settling)	Random	DVD-ROM: 170 ms (typical), CD-ROM: 170 ms (typical)
	Full Stroke	DVD-ROM: 320 ms (typical), CD-ROM: 320 ms (typical)
	Stop Time	6 seconds (typical)
Power	Source	Slimline SATA DC power receptacle
	DC Power Requirement	5 VDC ± 5%-100 mV ripple p-p
	DC Current	5 VDC (< 1000 mA typical, 1600 mA maximum)
Environmental conditions (operating - non-condensing)	Temperature	41° to 122° F (5° to 50° C)
	Relative Humidity	10% to 80%
	Maximum Wet Bulb Temperature	84° F (29° C)

Technical Specifications – Memory

HP Slim Blu-ray BDXL Drive			
Height	12.7mm height		
Orientation	Either horizontal or vertical		
Interface type	SATA/ATAPI		
Disc recording capacity	Up to 128 GB QL, 100 GB TL, 50 GB DL or 25 GB standard SL		
Dimensions (W x H x D)	5.04 x 0.5 x 5.0 in (128 x 12.7 x 127 mm) without bezel		
Weight (max)	Up to 0.37 lb (170 g) without bezel		
		Triple-layer	Quadruple-layer
Write speeds	BD-R	Up to 4X	Up to 4X
	BD-RE	Up to 2X	Not supported
		Single-layer	Double-layer
	BD-R	Up to 6X	Up to 6X
	BD-RE	Up to 2X	Up to 2X
	DVD-R	Up to 8X	Up to 6X
	DVD-RW	Up to 6X	Not supported
	DVD+R	Up to 8X	Up to 6X
	DVD+RW	Up to 8X	Not supported
	DVD-RAM	Up to 5X	
	CD-R	Up to 24X	
	CD-RW	Up to 24X	
		Triple-layer	Quadruple-layer
	BD-R	Up to 4X	Up to 4X
	BD-RE	Up to 4X	Not supported
		Single-layer	Double-layer
	BD-ROM	Up to 6X	Up to 6X
BD-R	Up to 6X	Up to 6X	
Read speeds	BD-RE	Up to 6X	Up to 6X
	DVD-ROM	Up to 8X	Up to 8X
	DVD-R	Up to 8X	Up to 8X
	DVD-RW	Up to 8X	
	DVD+R	Up to 8X	Up to 8X
	DVD+RW	Up to 8X	
	BDMV (AACs Compliant Disc)	Up to 6X/2X (Read/Play)	

Technical Specifications – Memory

	DVD-RAM	Up to 5X
	DVD-Video (CSS Compliant Disc)	Up to 8X/4X (Read/Play)
	CD-R/RW/ROM	Up to 24X
	CD-DA(DAE)	Up to 20X/10X (Read/Play)
Access time (typical reads, including settling)	Random	BD-ROM: 205 ms (typical), DVD-ROM: 185 ms (typical), CD-ROM: 165 ms (typical)
	Full Stroke	BD-ROM: 350 ms (typical), DVD-ROM: 345 ms (typical), CD-ROM: 340 ms (typical)
Power	Source	Slimline SATA DC power receptacle
	DC Power Requirement	5 VDC ± 5%-100 mV ripple p-p
	DC Current	5 VDC -1200 mA typical, 2000 mA maximum
Environmental conditions (operating - non-condensing)	Temperature	41° to 122° F (5° to 50° C)
	Relative Humidity	10% to 80%
	Maximum Wet Bulb Temperature	84° F (29° C)

HP Slim DVD-ROM Drive		
Height	12.7mm	
Orientation	Either horizontal or vertical	
Interface type	SATA/ATAPI	
Dimensions (W x H x D)	5.04 x 0.5 x 5.0 in (128 x 12.7 x 127 mm) without bezel	
Weight (max)	Up to 0.37 lb (170 g) without bezel	
Read speeds	DVD+R/-R/+RW/-RW/+R DL /-R DL	Up to 8X
	DVD-ROM	Up to 8X
	CD-ROM, CD-R	Up to 24X
	CD-RW	Up to 24X
Access time (typical reads, including settling)	Random	DVD-ROM: 170 ms (typical), CD-ROM: 170 ms (typical)
	Full Stroke	DVD-ROM: 320 ms (typical), CD-ROM: 320 ms (typical)
Power	Source	Slimline SATA DC power receptacle
	DC Power Requirement	5 VDC ± 5%-100 mV ripple p-p
	DC Current	5 VDC - <1000 mA typical, < 1600 mA maximum
Environmental (all conditions non-condensing)	Temperature	41° to 122° F (5° to 50° C)
	Relative Humidity	10% to 80%

Technical Specifications – Memory

	Maximum Wet Bulb Temperature (operating)	84° F (29° C)
--	--	---------------

System Memory Support

The HP EliteDesk 800 G1 Business PC supports the 4th generation Intel® Core™ processor family. Based on a new PC micro-architecture, the processor is designed for a two-chip platform consisting of a processor and Platform Controller Hub (PCH). Unlike previous generations, the 4th generation Intel® Core™ processor includes an Integrated Memory Controller (IMC). The IMC supports DDR3/DDR3L protocols with two independent, 64-bit wide channels each accessing one or two DIMMs.

- Two channels of non-ECC DDR3/DDR3L unbuffered dual in-line memory modules (UDIMM) or DDR3/DDR3L unbuffered small outline dual in-line memory modules (SO-DIMM) with a maximum of two DIMMs per channel
- Single-channel and dual-channel memory organization modes
- Data burst length of eight for all memory organization modes
- Memory data transfer rates of up to 1600 MT/s; actual supported data transfer rate determined by the configured processor.
- 64-bit wide channels
- DDR3/DDR3L system memory I/O voltage of 1.5V
- Theoretical maximum memory bandwidth of:
 - 21.3 GB/s in dual-channel mode assuming 1333 MT/s
 - 25.6 GB/s in dual-channel mode assuming 1600 MT/s

Platform Memory Support

- The Small Form Factor (SFF) and Tower (TWR) platforms support up to four (4) industry-standard DDR3-SDRAM DIMMs.
- The Ultra-slim Desktop (USDT) and Desktop Mini (DM) support up to two (2) industry-standard DDR3-SDRAM SO-DIMMs.

CAUTION: You must shut down the computer and disconnect the power cord before adding or removing memory modules. Regardless of the power-on state, voltage is always supplied to the memory modules as long as the computer is plugged in to an active AC outlet. Adding or removing memory modules while voltage is present may cause irreparable damage to the memory modules or system board.

NOTE: For systems configured with more than 3 GB of memory and a 32-bit operating system, all memory may not be available due to system resource requirements. Addressing memory above 4 GB requires a 64-bit operating system.

Technical Specifications – Networking and Communications

Intel® I217LM GbE Network Connection (integrated)	
Connector	RJ-45
System Interface	Integrated on PCA
Controller	Intel I217LM GbE platform LAN connect networking controller
Memory	24 KB FIFO packet buffer memory
Data rates supported	10/100/1000 Mbps
IEEE Compliance	802.1P 802.1Q 802.2 802.3 802.3ab 802.3az 802.3u
Bus architecture	PCI Express and SMBus
Data transfer mode	PCIe-based interface for active state operation (S0 state) and SMBus for host and management traffic (Sx low power state)
Power requirement	Requires 3.3V and 0.9V or just 3.3V with integrated regulators Power consumption 0.733 Watts
Boot ROM support	Yes
Network transfer mode	Full-duplex
	Half-duplex (not supported for the 1000BASE-T transceiver)
Network transfer rate	10BASE-T (half-duplex) 10 Mbps
	10BASE-T (full-duplex) 20 Mbps
	100BASE-TX (half-duplex) 100 Mbps
	100BASE-TX (full-duplex) 200 Mbps
	1000BASE-T (full-duplex) 2000 Mbps
Environmental	Operating Temperature: 0° to 85° C
	Operating Humidity: 60% RH
Management	WOL, auto MDI crossover, PXE, Multi-port teaming, RSS, Advanced cable diagnostic
Alerting	ASF 2.0 support; AMT 9.0 support

Technical Specifications – Networking and Communications

Intel® Ethernet I210-T1 Gigabit Network Adapter		
Connector	RJ-45	
System Interface	PCI Express x1	
Controller	Intel® I210 Gigabit Ethernet Controller	
Memory	Integrated Dual 48K configurable transmit receive FIFO Buffers	
Data rates supported	10/100/1000 Mbps	
IEEE Compliance	802.1P 802.1Q 802.2 802.3 802.3AB 802.3u 802.3x flow control	
Bus architecture	PCI-E 2.1	
Data path width	X1, 250 MB/s, Bi-directional interface	
Data transfer mode	Bus-master DMA	
Hardware certifications	FCC, B, CE, TUV-c, TUVus Mark Canada and United States, TUV-GS Mark for European Union	
Power requirement	Aux 3.3 V, 3.0 Watts in 1000 base-T and 1.0 Watts in 100 Base-T	
Boot ROM support	Yes 10BASE-T (half-duplex) 10 Mbps 10BASE-T (full-duplex) 20 Mbps	
Network transfer rate	10BASE-T (half-duplex) 10 Mbps	
	10BASE-T (full-duplex) 20 Mbps	
	100BASE-TX (half-duplex) 100 Mbps	
	100BASE-TX (full-duplex) 200 Mbps	
	1000BASE-T (full-duplex) 2000 Mbps (actual rate limited by PCI bus)	
Environmental	Operating Temperature:	32° to 132° F (0° to 55° C)
	Operating Humidity:	85% at 131° F (55° C)
Management	WOL, PXE, DMI, WFM 2.0	
Intel Centrino Advance-N 6205 Wireless Network Interface Connection		

Technical Specifications – Networking and Communications

Wireless LAN Standards	IEEE 802.11a/b/g/n
	IEEE 802.11 e, 802.11i, 802.11d, 802.11d, 802.11h
Interoperability	Wi-Fi certified (802.11 a/b/g/n WMM, WPA, WPA2 and WPS)
	Tested with wireless access points from several major manufacturers
	OS compatible with Microsoft Windows, Win7 and XP
	Cisco Compatible Extensions Program compliant (802.11a/b/g only) with Microsoft Windows XP and Windows 7
Frequency Band	2.4 GHz and 5 GHz
Antenna Structure	2 transmit; 2 receive (2x2)
Data Rates	802.11b: 1, 2, 5.5, 11 Mbps
	802.11a/g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps
	802.11n: 66 possible data rates, ranging from 6 Mbps to 300 Mbps, depending on the combination of Bandwidth, Modulation Coding Scheme, and Guard Interval used, as defined in IEEE 802.11n specification
Modulation	Direct Sequence Spread Spectrum DBPSK, DQPSK, CCK, OFDM, BPSK, QPSK, 16-QAM, 64-QAM
Security	Supports 64- and 128-bit WEP, WPA, WPA2, hardware-accelerated AES (support for key sizes of 128bits), TKIP, 802.1x authentication types EAP-TLS, EAP-TTLS, PEAP, MSCHAP, PEAP-MSCHAPv2, LEAP, EAP-FAST, EAP-SIM, EAP-AKA PAP, CHAP, TLS, GTC
	Support for Cisco Security Features (proven compatibility with Cisco Aironet infrastructure products through the Cisco Compatible Extensions Program Version 4) with Microsoft Windows XP only.
Sub-channels	Multinational support with frequency bands and channels compliant to local regulations.
Media Access Protocol	CSMA/CA (Collision Avoidance) with ACK
Network Architecture Models	Ad-hoc (Peer to Peer) Infrastructure (Access Point Required) Intel® My Wifi Technology (iPAN)
Roaming	Provide seamless roaming between like access points (same frequency band)
Output Power (for CCK)	15 dBm
Output Power (for OFDM; power varies by data rate)	15 dBm
Power Consumption	Transmit: 2.3 Watts (average, with one spatial streams)
	Receive: 1.9 Watts (average with two receive chains)
	Idle mode: 30mW – 40mW (average)
	Radio off: 20 mW (max)
Power Management	ACPI compliant power management 802.11 compliant power saving mode

Technical Specifications – Networking and Communications

Antenna Connections	3 U.FL type connectors, 50 ohm nominal impedance	
Range	802.11 a - Typical (@6 Mbps)	600 feet - Outdoor Open Area 150 feet - Indoor, Office environment
	802.11 b - Typical (@1 Mbps)	1200 feet - Outdoor Open Area 300 feet - Indoor, Office environment
	802.11 g - Typical (@1 Mbps)	1200 feet - Outdoor Open Area 300 feet - Indoor, Office environment
Form Factors	USDT:	MiniPCI-Express
	CMIT & SFF:	PCIe
Weight	0.013 lb (4.0 g)	
Dimensions	1.1 x 1.2 in (26.8 x 30.0 mm)	
Operating Voltage	3.3V +/- 9%, 1.5V +/- 5%	
Temperature	Operating:	32° to 176° F (0° to 80° C)
	Non-operating:	-40° to 176° F (-40° to 80° C)
Humidity	Operating:	10% to 90% (non-condensing)
	Non-operating:	5% to 90% (non-condensing)
	Microsoft Windows XP	Microsoft Windows Win 7
Configuration Utility	<ul style="list-style-type: none"> Microsoft Windows XP Wireless Network Connection Manager Intel PROSet for Microsoft Windows XP (required for Cisco Compatible Extensions support) 	Intel IHV extensions for Win7 available to support Cisco Compatible Extensions

Technical Specifications - Audio

High Definition Audio	
Type	Integrated
HD Stereo Codec	Realtek 2-channel ALC221 codec
Audio I/O Ports	Front microphone-In (150-K ohm Input Impedance)
	Rear Line-In/Microphone input (150-K ohm Input Impedance, function is configurable by audio driver)
	Rear Line-Out* (190 ohms Output Impedance, expects at least a 10-K ohm load)
	Front Headphone-Out (0.5 Ohm Output Impedance, expects at least a 32 ohm load) Front Microphone/Headphone jack is re-task able to provide Microphone input, line-in or Headphone output to support connecting two headphones to the front of the system. When configured as a second front headphone output, both front headphone outputs are always driven with the same signal.
	All ports are 3.5mm
Internal Speaker Amplifier	1.5W amplifier for the internal speaker only. External speakers must be powered externally. Rear Line-in audio port is re-taskable as either Line-in or Microphone-In.
Multi-streaming Capable	Multi-streaming can be enabled in the Realtek control panel to allow independent audio streams to be sent to/from the front and rear jacks.
Sampling	8 kHz - 192 kHz
Wavetable Syntheses	Yes – Uses OS soft wavetable
Analog Audio	Yes
# of Channels on Line-Out	Stereo (Left & Right channels)
Internal Speaker	Yes
External Speaker Jack	Yes

Technical Specifications - Input/Output Devices

HP USB Keyboard		
Physical characteristics	Keys	104, 105, 106, 107, 109 layout (depending upon country)
	Dimensions (L x W x H)	18.12 x 6.47 x 0.96 in (46.03 x 16.43 x 2.44 cm)
	Weight	2 lb (0.9 kg)
Electrical	Operating voltage	+ 5VDC ± 5%
	Power consumption	50-mA maximum (with three LEDs ON)
	System interface	USB Type A plug connector
	ESD	CE level 4, 15-kV air discharge
	EMI - RFI	Conforms to FCC rules for a Class B computing device
	Microsoft® PC 99 - 2001	Functionally compliant
Mechanical	Keycaps	Low-profile design
	Switch actuation	55-g nominal peak force with tactile feedback
	Switch life	20 million keystrokes (using Hasco modified tester)
	Switch type	Contamination-resistant switch membrane
	Key-leveling mechanisms	For all double-wide and greater-length keys
	Cable length	6 ft (1.8 m)
	Microsoft PC 99 - 2001	Mechanically compliant
Environmental	Acoustics	43-dBA maximum sound pressure level
	Operating temperature	50° to 122° F (10° to 50° C)
	Non-operating temperature	-22° to 140° F (-30° to 60° C)
	Operating humidity	10% to 90% (non-condensing at ambient)
	Non-operating humidity	20% to 80% (non-condensing at ambient)
	Operating shock	40 g, six surfaces
	Non-operating shock	80 g, six surfaces
	Operating vibration	2-g peak acceleration

Technical Specifications - Input/Output Devices

	Non-operating vibration	4-g peak acceleration
	Drop (out of box)	26 in (66 cm) on carpet, six-drop sequence
	Drop (in box)	30 in (76.2 cm) on concrete, 16-drop sequence
Approvals	UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BSMI, C-Tick, KC	
Ergonomic compliance	ANSI HFS 100, ISO 9241-4, and TUVGS	
Kit contents	Keyboard	Installation Guide
	Warranty Card	Safety and Comfort Guide

HP PS/2 Keyboard

Physical Characteristics	Keys	104, 105, 106, 107, 109 layout (depending upon country)
	Dimensions (L x W x H)	18.22 x 6.47 x 1.1 in (46.28 x 16.43 x 2.79 cm)
	Weight	2 lb (0.9 kg) minimum
Electrical	Operating voltage	+ 5VDC \pm 10%
	Power consumption	50-mA maximum (with three LEDs ON)
	System interface	PS/2 6-pin mini din connector
	ESD	CE level 4, 15-kV air discharge
	EMI - RFI	Conforms to FCC rules for a Class B computing device
	Microsoft PC 99 - 2001	Functionally compliant
	Keycaps	Low-profile design
	Switch actuation	55-g nominal peak force with tactile feedback
	Switch life	20 million keystrokes (using Hasco modified tester)
	Switch type	Contamination-resistant switch membrane
	Key-leveling mechanisms	For all double-wide and greater-length keys
	Cable length	6 ft (1.8 m)
	Microsoft PC 99 - 2001	Mechanically compliant
Environmental	Acoustics	50-dBA maximum sound pressure level

Technical Specifications - Input/Output Devices

	Operating temperature	32° to 104° F (0° to 40° C)
	Non-operating temperature	-22° to 149° F (-30° to 65° C)
	Operating humidity	15% to 80% (non-condensing at ambient)
	Non-operating humidity	15% to 90% (non-condensing at ambient)
	Operating shock	N/A
	Non-operating shock	65 inch 2.9 ms, six surface; 30g 266 inch/second; 50g 266 inch/second six surface
	Operating vibration	2-g peak acceleration
	Non-operating vibration	Starting at 5 Hz, vary the frequency of vibration from 5 to 500 Hz and back to 5 Hz at a Logarithmic sweep rate of 1 octave per minute.
	Drop (out of box)	26 in (66 cm) on carpet, six-drop sequence
	Drop (in box)	29.93 in (76 cm) on concrete, 16-drop sequence
Approvals	CUL, ICES-003 Class B, FCC, CE Mark, TUV GS, VCCI, BSMI, C-Tick, KC	
Ergonomic compliance	ANSI HFS 100, ISO 9241-4, and TUVGS	

HP USB Smart Card (CCID) Keyboard

Key Benefits:	<ul style="list-style-type: none"> Protects against unauthorized access with smart card technology Delivers even greater security when combined with a HP Client Security smart card and the HP Client Security Security Software Combination of username and password or pin with a smart card or security token Secures online transactions using digital signatures and certificates Conforms to industry standards for ease of setup and use Delivers long product life and quiet operation with high-impact materials and lubricated keys Spill drain feature 	
Physical Characteristics	Keys	104, 105, 106, 107, 109 layout (depending upon country)
	Form factor	USB basic smart card keyboard
	Colors	Carbonite/Silver
	Dimensions (H x W x D)	18.2 x 6.3 x 1.3 in (46.3 x 16.1 x 3.3 cm)
	Weight	2 lb (0.9 kg) minimum

Technical Specifications - Input/Output Devices

Electrical	Operating voltage	+ 5VDC ± 5%
	Power consumption	100-mA maximum (with four LEDs ON)
	System interface	USB Type A plug connector
	ESD	CE level 4, 15-kV air discharge
	EMI - RFI	Conforms to FCC rules for a Class B computing device
	Microsoft PC 99 - 2001	Functionally compliant
Mechanical	Languages	30+ available
	Keycaps	Standard design
	Switch actuation	55 g nominal peak force with tactile feedback
	Switch life	20 million keystrokes (using Hasco modified tester)
	Switch type	Contamination-resistant membrane
	Key-leveling mechanisms	For all double-wide and greater-length keys
	Cable length	6 ft (1.8 m)
	Microsoft PC 99 - 2001	Mechanically compliant
Environmental	Acoustics	43-dBA maximum sound pressure level
	Operating temperature	50° to 122° F (10° to 50° C)
	Non-operating temperature	-22° to 140° F (-30° to 60° C)
	Operating humidity	10% to 90% (non-condensing at ambient)
	Non-operating humidity	20% to 80% (non-condensing at ambient)
	Operating shock	40 g, six surfaces
	Non-operating shock	80 g, six surfaces
	Operating vibration	2-g peak acceleration
	Non-operating vibration	4-g peak acceleration
	Drop (out of box)	26 in (66 cm) on carpet, six-drop sequence
	Drop (in box)	42 in (107 cm) on concrete, 16-drop sequence
SmartCard Function	Support	All ISO 7816 smart cards

Technical Specifications - Input/Output Devices

	Interface	Reads from and writes to all ISO7816-1, 2, 3, 4 memory and microprocessor smart cards (T=0, T=1)		
	Chipset	SCM STCII		
	Standard APIs supported	PC/SC, EMV2000, SET		
	Power	USB Port		
		Short circuit detection (protects smart card and reader)		
		Power supply compliant with ISO7816 and EMV (5V, 60 mA)		
		Supports 3-V and 5-V cards		
	Power consumption	100-mA maximum draw		
	Communication	From card	9600 bps to 330,000 bps	
		From computer	12 Mbps (USB transfer speed)	
	Landing mechanism	Contact device	Friction contact	
		Card insertions rating	Up to 100,000 insertion cycles	
	Interface modes	CCID protocol		
	Reader performance interface	USB connection		
Electro-magnetic standards	Europe	2004/108/EC		
	USA	USAFCC part 15		
Approvals	CE-Mark, UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BSMI, C-Tick, MIC, EMV2000, USB-IF			
Ergonomic Compliance	ISO 9241-4, TUVGS			
Kit Contents	Keyboard, I/O Security and Documentation CD, warranty card			
HP USB PS/2 Washable Keyboard				
Physical Characteristics	Keys	104 (US) Layout, 105 (EU) layout – depending upon country		
	Dimensions (L x W x H)	17.67x 6.62 x 1.38 in (449 x 168 x 35 mm)		
	Weight	1.7 lb (0.77 kg) minimum		
Electrical	Operating voltage	+ 5VDC ±5%		
	Power consumption	50-mA maximum (with three LEDs ON)		

Technical Specifications - Input/Output Devices

	System interface	USB Type A plug connector
	ESD	CE level 4, 15-kV air discharge
	EMI - RFI	Conforms to FCC rules for a Class B computing device
	Microsoft PC 99 - 2001	Functionally compliant
Mechanical	Keycaps	Stepped -profile design
	Switch actuation	55-g nominal peak force with tactile feedback
	Switch life	20 million keystrokes
	Switch type	Contamination-resistant switch membrane
	Key-leveling mechanisms	For all double-wide and greater-length keys
	Cable length	7 ft (2.2 m)
	Microsoft PC 99 - 2001	Mechanically compliant
Environmental	Acoustics	43-dBA maximum sound pressure level
	Operating temperature	50° to 122° F (10° to 50° C)
	Non-operating temperature	4° to 149° F (-20° to 65° C)
	Operating humidity	10% to 95% (non-condensing at ambient)
	Non-operating humidity	0% to 95% (non-condensing at ambient)
	Operating shock	40 g, six surfaces
	Non-operating shock	80 g, six surfaces
	Operating vibration	2-g peak acceleration
	Non-operating vibration	4-g peak acceleration
	Drop (out of box)	26 in (66 cm) on carpet, six-drop sequence
Drop (in box)	42 in (107 cm) on concrete, 16-drop sequence	
Operating system support	Windows® 7, Windows Vista, Windows XP Professional	
Approvals	UL, cUL, FCC, CE, TUV GS, VCCI, BSMI, C-Tick, KCC, USB-IF, WHQL, EN/IEC 60601-1, IP66/NEMA4X	
Ergonomic compliance	ANSI HFS 100, ISO 9241-4, and TUVGS	

HP Wireless Keyboard and Mouse

Keyboard	Dimensions (H x L x W)	1.09 x 18.1 x 6.47 in (27.87 x 460.3 x 164.3 mm)
	Weight – Without Two AA Alkaline Batteries	1.94 lb (880 g)
Mouse	Dimensions (H x L x W)	1.46 x 4.53 x 2.47 in (37 x 115 x 62.9 mm)
	Weight – Without Two AA Alkaline Batteries	0.15 lb (67 g)
Receiver	Dimensions (H x L x W)	0.33x 1.79 x 0.72 in (8.4 x 45.5 x 18.4 mm)
	Weight	0.21 oz (5.9 g)

Technical Specifications - Input/Output Devices

	Cable Length – Minimum	6 ft (1.8 m)
	Range	32.8 ft (10 m)
System Requirements	<p>Windows 7 Home Basic*, Windows 7 Home Premium*, Windows 7 Professional Edition 32*, Windows 7 Professional Edition 64*, Windows 7 Ultimate Edition 32*, Windows 7 Ultimate Edition 64* Windows Vista or Windows XP</p> <p>Available USB port for the receiver</p> <p>CD-ROM Drive</p> <p>*This system may require upgraded and/or separately purchased hardware and/or a DVD drive to install the Windows 7 software and take full advantage of Windows 7 functionality. See http://www.microsoft.com/windows/windows-7/ for details.</p>	
Approvals	Product Safety	UL; CSA /TUV (Europe only); CE Mark; CB Report
	Ergonomics	ANSI; ISO (Europe only); GS Mark (Germany only)
	EMC	FCC; CE; ACA (-tick); BSMI; KC ; VCCI
	CE Mark	EN 55022:2010; EN 55024; EN 301489-1; EN 61000
	Design Guidelines for PCs	PC 99 – connector overmold colors; PC 2001 – full functionality
	Telecom	All local telecom requirements and approvals for intended markets
	USA	FCC Title 47 CFR, Par 15, Subpart C; other local requirements
	Country Support	US, Belgium, Switzerland, Spain, Denmark, Netherlands, France, Germany, Italy, Portugal, Sweden, Norway, Finland, UK, Poland, Czech Republic, Turkey, Greece, Austria, Bulgaria, Cyprus, Estonia, Hungary, Ireland, Latvia, Lithuania, Luxemburg, Malta, Romania, Slovakia, Slovenia, Vietnam, HK, Australia, NZ, Malaysia, Singapore, Indonesia, Philippines, Thailand, Canada, China, Japan, Korea, Taiwan, India, Venezuela, Ecuador, Russia, Ukraine, Israel, Croatia, United Arab Emirates, Peru, Brazil, Chile, Argentina, Mexico, South Africa, and up to 193 countries worldwide.
Environmental	Keyboard contains 25% post-consumer recycled plastic material.	

HP PS/2 Mouse

Dimensions (H x L x W)	1.46 x 2.48 x 4.53 in (3.70 x 6.29 x 11.50 cm)	
Weight	3.53 oz (100g; +10g/- 5 g)	
Environmental	Operating temperature	-32° to 104°F (0° to 40° C)
	Non-operating temperature	-4° to 140°F (-20° to 60° C)

Technical Specifications - Input/Output Devices

	Operating humidity	10% to 90% (non condensing at ambient)
	Non-operating humidity	10% to 90% (non condensing at ambient)
	Operating shock	40 g, 6 surfaces
	Non-operating shock	80 g, 6 surfaces
	Operating vibration	2 g peak acceleration
	Non-operating vibration	4 g peak acceleration
	Drop (out of box)	80 cm height onto asphalt tile over concrete or equivalent, 5-drop in 5 direction except the cable face
Electrical	Operating voltage	5 VDC \pm 10%
	Power consumption	100mA
	System consumption	PS/2 mini-din connector
	ESD	CE level 4, 15 kV air discharge
	EMI-RFI	Conforms to FCC rules for a Class B computing device
	Microsoft PC99 - 2001	Functionally compliant
Mechanical	Resolution	800 DPI
	Tracking speed	10 in/s (25.4 cm/s) maximum
	Acceleration	\pm 15%
	Switch actuation	65 \pm 20 gf
	Switch life	3,000,000 operations (using Hasco modified tester)
	Switch type	Low force micro-switches
	Tracking mechanism life	80 km
	Cable length	6 ft (1.8 m)
	Microsoft PC99 - 2001	Mechanically compliant
Scroll wheel	Width	6 mm
	Diameter	22.5 \pm 0.2 mm

Technical Specifications - Input/Output Devices

	Maximum rotation force	50 gf-cm
	Switch type	Light force micro-switch
	Switch life	1 million operations
	Mechanical life	Minimum 200,000 revolutions
Regulatory Approvals	UL/cUL, FCC, CE Mark, TUV/GS, VCCI, KCC, BSMI, C-Tick	

HP USB Mouse

Dimensions (H x L x W)	1.5 x 4.5 x 2.5 in (3.7 x 11.5 x 6.3 cm)
Weight	0.22 lb (0.10 kg)
Cable length	70.9 in (180 cm)
System requirements	Available USB port

HP USB 1000dpi Laser Mouse

Dimensions (H x L x W)	1.47 x 4.53 x 2.47 in (37.3 x 114.97 x 62.86 mm)	
Weight	3.360 oz (102g)	
Cable length	70.9 in (180 cm)	
System requirements	Available USB port	
Environmental	Operating Temperature	32° to 104° F (0° to 40° C)
	Non-operating Temperature	-4° to 140° F (-20° to 60° C)
	Operating Humidity	10% to 90% (non-condensing at ambient)
Mechanical	Resolution	1000dpi
	Tracking Speed	45 cm/sec
	Cable Length	70.9 in (180 cm)

HP USB PS/2 Washable Mouse

Technical Specifications - Input/Output Devices

Dimensions (H x L x W)	1.56 x 2.44 x 4.61 in (3.95 x 6.21 x 11.7 cm)	
Weight	4.44 oz (126 g)	
Environmental	Operating temperature	-32° to 104°F (0° to 40° C)
	Non-operating temperature	-4° to 140°F (-20° to 60° C)
	Operating humidity	10% to 90% (non-condensing at ambient)
	Non-operating humidity	10% to 90% non-condensing
	Operating shock	40 g, 6 surfaces
	Non-operating shock	80 g, 6 surfaces
	Operating vibration	2 g peak acceleration
	Non-operating vibration	4 g peak acceleration
	Drop (out of box)	80 cm height onto asphalt tile over concrete or equivalent, 5-drop in 5 direction except the cable face
Electrical	Operating voltage	5 VDC ± 10%
	Power consumption	100mA
	System consumption	PS/2 mini-din connector or USB
	ESD	CE level 2 8 kV air discharge
	EMI-RFI	Conforms to FCC rules for a Class B computing device
	Microsoft PC99 - 2001	Functionally compliant
Mechanical	Resolution	1000 ± 20% DPI
	Tracking speed	14 in/s (35.56 cm/s) maximum
	Acceleration	2 g
	Switch actuation	70 g nominal peak force

Technical Specifications - Input/Output Devices

	Switch life	3,000,000 operations (using Hasco modified tester)
	Switch type	Low force micro-switches
	Tracking mechanism life	8.8 ft total 70 cm+ 2m extension
	Cable length	Mechanically compliant
	Microsoft PC99 - 2001	1000 ± 20% DPI
Scroll wheel	Width	6 mm
	Diameter	1 in (25.4 mm)
	Maximum rotation force	48 rats/sec
	Switch type	Light force micro-switch
	Switch life	3 million operations
	Mechanical life	Minimum 200,000 revolutions
Regulatory Approvals	FCC, CE Mark, ICES-003-B, IP66/NEMA4X	

Technical Specifications – Power

Unit Environment and Operating Conditions

General Unit Operating Guidelines

- Keep the computer away from excessive moisture, direct moisture and the extremes of heat and cold, to ensure that unit is operated within the specified operating range.
- Leave a 10.2 cm (4 in) clearance on all vented sides of the computer to permit the required airflow.
- Never restrict airflow into the computer by blocking any vents or air intakes.
- Do not stack computers on top of each other or place computers so near each other that they are subject to each other's re-circulated or preheated air.
- Occasionally clean the air vents on the front, back, and any other vented side of the computer. Lint, dust and other foreign matter can block the vents and limit the airflow.
- If the computer is to be operated within a separate enclosure, intake and exhaust ventilation must be provided on the enclosure, and the same operating guidelines listed above will still apply.

Temperature Range	Operating: 50° to 95° F (10° to 35° C)* Non-operating: -22° to 140° F (-30° to 60° C)
Relative Humidity	Operating: 10% to 90% (non-condensing at ambient) Non-operating: 5% to 95% (non-condensing at ambient)
Maximum Altitude (unpressurized)	Operating: 10,000 ft (3048 m) Non-operating: 30,000 ft (9144 m)

*Operating temperature is de-rated 1.0 deg C per 300 m (1000 ft) to 3000 m (10,000 ft) above sea level, no direct sustained sunlight. Maximum rate of change is 10 deg C/Hr. The upper limit may be limited by the type and number of options installed.

Power Supply	DM	USDT	SFF	TWR
Standard Efficiency	65W active PFC 87% efficient	Integrated graphics: Discrete graphics:	135W active PFC 87% efficient 180W active PFC 87% efficient 240W active PFC 240W active PFC	320W active PFC 320W active PFC
80 PLUS Gold	N/A	N/A	87/90/87% efficient at 20/50/100% load (115V) 89/91/90% efficient at 20/50/100% load (230V) 240W active PFC	87/90/87% efficient at 20/50/100% load (115V) 89/92/90% efficient at 20/50/100% load (230V) 320W active PFC
80 PLUS Platinum	N/A	N/A	90/92/89% efficient at 20/50/100% load (115V) 90/93/91% efficient at 20/50/100% load (230V)	90/92/89% efficient at 20/50/100% load (115V) 90/94/91% efficient at 20/50/100% load (230V)
Operating Voltage Range	90 - 264 VAC	90 - 264 VAC	90 - 264 VAC	90 - 264 VAC
Rated Voltage Range	100 - 240 VAC	100 - 240 VAC	100 - 240 VAC	100 - 240 VAC
Rated Line Frequency	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz
Operating Line Frequency	47 - 63 Hz	47 - 63 Hz	47 - 63 Hz	47 - 63 Hz
Rated Input Current	N/A	N/A	4A	5.5A
Rated Input Current with Energy Efficient* Power Supply		135W: 2.4A 180W: 2.9A	4A	5.5A
DC Output	+19.5V	N/A	N/A	N/A

Technical Specifications – Power

Current Leakage (NFPA 99)	< 250 μ A	< 250 μ A	< 275 μ A	<450=>275uA
Power Supply Fan	N/A	N/A	92=>70mm variable speed	92mm variable speed
Power cord length	N/A	N/A	6.0 ft. (1.83 m)	6.0 ft. (1.83 m)
External Power Adapter				
Dimensions	2.2 x 1.2 x 4.5 in 55 x 30 x 113.5 mm	2.8 x 1.7 x 6.6 in 70 x 42 x 167.5 mm	N/A	N/A
Total Cord Length	12 ft 8 in	12 ft 8 in	N/A	N/A

Technical Specifications – Weights & Dimensions

Weights & Dimensions

(configured with 1 HDD & 1 ODD; DM configured with 1 HDD only)

	DM	USDT	SFF	TWR
Chassis (W x H x D)	6.9 x 1.3 x 7.0 in 175 x 34 x 177 mm	9.9 x 2.6 x 10 in 251 x 66 x 254 mm	13.3 x 3.95 x 14.9 in 338 x 100 x 379 mm	6.7 x 15.7 x 17.4 in 170 x 399 x 442 mm
System Volume	62.79 cu in 1.05 L	257.5 cu in 4.2 L	782.7 cu in 12.8 L	1828 cu in 30 L
System Weight*	2.9 lb 1.3 kg	6.8 lb 3.1 kg	16.7 lb 7.6 kg	20.5 lb 9.3 kg
Max Supported Weight (desktop orientation)	N/A	77.0 lb 35.0 kg	77.0 lb 35.0 kg	77.0 lb 35.0 kg
Stand Dimensions	77x 4.6 x 6.3 in 19.5 x 117 x 160 mm Weight: 47g/ .1 lbs.	1.1 x 4.9 x 6.7 in 27 x 125 x 170 mm	1.1 x 7.0 x 7.9 in 29 x 178 x 200 mm	N/A
Packaging (H x W x D)	7.8 x 11.4 x 19.7 in 198 x 290 x 500 mm	8.6 x 15.7 x 19.7 in 218 x 398 x 500 mm	9.0 x 19.7 x 23.4 in 229 x 500 x 594 mm	11.6 x 19.7 x 23.2 in 295 x 500 x 590 mm
Shipping Weight	9.0 lb. 4.1 kg	14.4 lb 6.5 kg	17.9 lb 8.1 kg	28.8 lb 13.1 kg
Palletization Profile	8-units per layer 10/12 layer max 80/96 per pallet	6-units per layer 10-layer max. 60-units per pallet	4-units per layer 10-layer max. 40-units per pallet	4-units per layer 8-layer max. 32-units per pallet
<i>Dependent on 40-Ft Stnd. Sea Container or 40-Ft High-cube Sea Container is used)</i>				

Technical Specifications – Miscellaneous Features

Management Features

- Advanced Configuration and Power Management Interface (ACPI). Allows the system to wake from a low power mode. Controls system power consumption, making it possible to place individual cards and peripherals in a low-power or powered-off state without affecting other elements of the system.
- Intel Wired for Management support; industry wide initiative to make Intel architecture based PCs, servers and mobile computers more inherently manageable out-of-the-box and over the network
- Dual State Power Button; acts as both an on/off button and a suspend-to-sleep button

Serviceability Features

- Dual colored power LED on front of computer to indicate either normal or fault condition
- Diagnostic LED Explanation Table:
 - Number of 1-second red LED blinks followed by a 2-second pause, then repeats:
 - 2 - processor thermal protection activated
 - 3 - processor not installed
 - 4 - power supply failure
 - 5 -- memory error
 - 6 - video error
 - 7 - PCA failure (ROM detected failure prior to video)
 - 8 - invalid ROM, boot block recovery mode
 - 9 - system not fetching code
 - 10 - system hang while loading an option ROM
- HP PC Hardware Diagnostics UEFI:
 - This utility enables hardware level testing outside the operating system on many components. The diagnostics can be invoked by pressing F2 at POST, and is available as a download from HP Support
- System/Emergency ROM
- Flash ROM
- CMOS Battery Holder for easy replacement
- Flash Recovery with Video Configuration Record Software
- 5 Aux Power LED on System PCA
- Processor ZIF Socket for easy Upgrade
- Over-Temp Warning on Screen (Requires IM Agents)
- Clear Password Jumper
- DIMM Connectors for easy Upgrade
- Clear CMOS Button
- NIC LEDs (integrated) (Green & Amber)
- Dual Color Power and HD LED - To Indicate Normal Operations and Fault Conditions
- Color coordinated cables and connectors
- Tool-less Hood Removal
- Front power switch
- System memory can be upgraded without removing the system board or any internal components
- Tool-less Hard Drive, CD & Diskette Removal
- Green Pull Tabs, and Quick Release Latches for easy Identification

Additional Features

Towerable Orientation

Description
Product can be oriented as either a desktop (horizontal) or a tower (vertical)

Drive Lock

Implementation of the industry standard ATA Security feature set. When enabled, it prevents software access to user data on the drive until one or two user-defined passwords are provided.

Drive Protection System

DPS Access through F10 Setup during Boot

Technical Specifications – Miscellaneous Features

A diagnostic hard drive self-test. It scans critical physical components and every sector of the hard drive for physical faults and then reports any faults to the user. Running independently of the operating system, it can be accessed through a Windows-based diagnostics utility or through the computer's setup procedure. It produces an evaluation on whether the hard drive is the source of the problem and needs to be replaced.

The system expands on the Self-Monitoring, Analysis, and Reporting Technology (SMART), a continuously running systems diagnostic that alerts the user to certain types of failures.

SMART Technology (Self-Monitoring, Analysis and Reporting Technology)

Allows hard drives to monitor their own health and to raise flags if imminent failures were predicted.

SMART I - Drive Failure Prediction

Predicts failures before they occur. Tracks fault prediction and failure indication parameters such as re-allocated sector count, spin retry count, calibration retry count.

SMART II - Off-Line Data Collection

By avoiding actual hard drive failures, SMART hard drives act as "insurance" against unplanned user downtime and potential data loss from hard drive failure.

SMART III - Off-Line Read Scanning with Defect Reallocation

IOEDC: I/O Error Detection Circuitry

Detects errors in Read/Write buffers on HDD cache RAM.

SMART IV - End-to-End CRC for hard drives

Interface in F10 setup provides confirmation of SMART IV support.

Technical Specifications – Environmental Data

Environmental Data

Eco-Label Certifications & Declarations

This product series has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:

- US ENERGY STAR®
- IT ECO declaration
- EPEAT® Gold where HP registers commercial desktop products. See <http://www.epeat.net> for registration status in your country.

System Configuration

The configuration used for the Energy Consumption and Declared Noise Emissions data is based on a typically configured PC featuring a hard disk drive, a high efficiency power supply, and a Microsoft Windows® operating system.

Model	Energy Consumption in accordance with US ENERGY STAR® test method (typically configured)	115 VAC	230 VAC	100 VAC
DM	Normal Operation (Short idle)	8.1 W	8.2 W	8.2 W
	Normal Operation (Long idle)	6.6 W	6.7 W	6.7 W
	Sleep	1.7 W	1.6 W	1.7 W
	Off	1.03 W	1.01 W	1.05 W
USDT	Normal Operation	15.16 W	15.72 W	15.08 W
	Sleep (ENERGY STAR® low power mode)	0.98 W	1.01 W	0.97 W
	Off	0.80 W	0.83 W	0.80 W
SFF	Normal Operation	22.90 W	22.78 W	23.08 W
	Sleep (ENERGY STAR® low power mode)	1.64 W	1.73 W	1.64 W
	Off	0.70 W	0.77 W	0.70 W
TOWER	Normal Operation	25.74 W	28.27 W	26.01 W
	Sleep (ENERGY STAR® low power mode)	1.66 W	1.76 W	1.65 W
	Off	0.68 W	0.78 W	0.67 W

Note: Energy efficiency data listed is for an ENERGY STAR® compliant product if offered within the model family. HP computers marked with the ENERGY STAR® Logo are compliant with the applicable U.S. Environmental Protection Agency (EPA) ENERGY STAR® specifications for computers. If a model family does not offer ENERGY STAR® compliant configurations, then energy efficiency data listed is for a typically configured PC featuring a hard disk drive, a high efficiency power supply, and a Microsoft Windows® operating system.

Model	Heat Dissipation*	115 VAC	230 VAC	100 VAC
DM	Normal Operation (Short idle)	28 BTU/hr	28 BTU/hr	28 BTU/hr

Technical Specifications – Environmental Data

	Normal Operation (Long idle)	23 BTU/hr	23 BTU/hr	23 BTU/hr
	Sleep	6 BTU/hr	6 BTU/hr	6 BTU/hr
	Off	3 BTU/hr	3 BTU/hr	3 BTU/hr
USDT	Normal Operation	52 BTU/hr	54 BTU/hr	64 BTU/hr
	Sleep	3 BTU/hr	3 BTU/hr	3 BTU/hr
	Off	3 BTU/hr	3 BTU/hr	3 BTU/hr
SFF	Normal Operation	78 BTU/hr	78 BTU/hr	79 BTU/hr
	Sleep	6 BTU/hr	6 BTU/hr	6 BTU/hr
	Off	2 BTU/hr	3 BTU/hr	2 BTU/hr
TOWER	Normal Operation	88 BTU/hr	97 BTU/hr	89 BTU/hr
	Sleep	6 BTU/hr	6 BTU/hr	6 BTU/hr
	Off	2 BTU/hr	3 BTU/hr	2 BTU/hr

*NOTE: Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.

Declared Noise Emissions (in accordance with ISO 7779 and ISO 9296)		Sound Power (LWAd, bels)	Sound Pressure (LpAm, decibels)
Model	(Typically configured)		
DM	Idle	3.6	25
	Fixed Disk (random writes)	3.6	24
USDT	Idle	3.6	27
	Fixed Disk (random writes)	3.6	27
SFF	Idle	3.6	26
	Fixed Disk (random writes)	3.6	26
TOWER	Idle	3.6	25
	Fixed Disk (random writes)	3.6	26

Longevity and Upgrading This product can be upgraded, possibly extending its useful life by several years.

Spare parts are available throughout the warranty period and or for up to "5" years after the end of production.
This battery(s) in this product comply with EU Directive 2006/66/EC

Batteries

Batteries used in the product do not contain:

- Mercury greater the 1ppm by weight
- Cadmium greater than 20ppm by weight

Battery Size

CR2032 (coin cell)

Technical Specifications – Environmental Data

Model	Battery Type	Additional Information
	Lithium	
DM		<ul style="list-style-type: none"> This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive - 2002/95/EC. This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive - 2002/96/EC. This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986). This product is in compliance with the IEEE 1680 (EPEAT) standard at the Gold where HP registers commercial desktop products. See http://www.epeat.net for registration status in your country. Plastics parts weighing over 25 grams used in the product are marked per ISO 11469 and ISO1043. This product contains 16% post consumer recycled plastic (by wt.) This product is 91.3% recyclable when properly disposed of at end of life. ALL Form Factors are UL Certified

Packaging Materials

- External:
 - PAPER/Corrugated 852 g
- Internal:
 - PLASTIC/EPE (Expanded Polyethylene) 38 g
 - PLASTIC/Polyethylene low density 13 g
 - PLASTIC/Polypropylene 8 g
- The plastic packaging material contains at least 9.5 % recycled content. The PLASTIC/Polyethylene low density material contains at least 60.42% recycled content.
- The corrugated paper packaging materials contains at least 42.3% recycled content.

USDT	<ul style="list-style-type: none"> This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive - 2002/95/EC. This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive - 2002/96/EC. This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986). This product is in compliance with the IEEE 1680 (EPEAT) standard at the Gold where HP registers commercial desktop products. See http://www.epeat.net for registration status in your country. Plastics parts weighing over 25 grams used in the product are marked per ISO 11469 and ISO1043. This product contains 12.2% post consumer recycled plastic (by wt.) This product is 95.4% recyclable when properly disposed of at end of life. ALL Form Factors are UL Certified
-------------	---

Packaging Materials

- External:
 - PAPER/Corrugated 1526.2 g
- Internal:
 - PLASTIC/Polyethylene low density 177 g
- The PAPER/Corrugated material contains at least 49.42% recycled content.
- The PLASTIC/Polyethylene low density material contains at least 60.42% recycled content.

Technical Specifications – Environmental Data

SFF

- This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive - 2002/95/EC.
- This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive - 2002/96/EC.
- This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986).
- This product is in compliance with the IEEE 1680 (EPEAT) standard at the Gold where HP registers commercial desktop products. See <http://www.epeat.net> for registration status in your country.
- Plastics parts weighing over 25 grams used in the product are marked per ISO 11469 and ISO1043.
- This product contains 14.8% post consumer recycled plastic (by wt.)
- This product is 94.1% recyclable when properly disposed of at end of life.

Packaging Materials

- External:
 - PAPER/Corrugated 2300 g
- Internal:
 - PLASTIC/EPE-Expanded Polyethylene 110 g
 - PLASTIC/Polyethylene low density 56 g
 - PLASTIC/Polypropylene 15 g
- The PAPER/Corrugated material contains at least 38.38% recycled content.
- The PLASTIC/EPE-Expanded Polyethylene material contains at least 60.42% recycled content.
- The PLASTIC/Polyethylene low density material contains at least 60.42% recycled content.

TOWER

- This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive - 2002/95/EC.
- This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive - 2002/96/EC.
- This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986).
- This product is in compliance with the IEEE 1680 (EPEAT) standard at the Gold where HP registers commercial desktop products. See <http://www.epeat.net> for registration status in your country.
- Plastics parts weighing over 25 grams used in the product are marked per ISO 11469 and ISO1043.
- This product contains 14.9% post consumer recycled plastic (by wt.)
- This product is 95.5% recyclable when properly disposed of at end of life.

Packaging Materials

- External:
 - PAPER/Corrugated 2280 g
- Internal:
 - PLASTIC/EPE (Expanded Polystyrene) 144 g
 - PLASTIC/Polyethylene low density 40 g
 - PLASTIC/Polypropylene 15 g
- The PAPER/Corrugated material contains at least 53.5% recycled content.
- The PLASTIC/EPE (Expanded Polystyrene) material contains at least 60.42% recycled content.
- The PLASTIC/Polyethylene low density material contains at least 60.42% recycled content.
- The PLASTIC/Polypropylene material contains at least 60.42% recycled content.

RoHS Compliance

Hewlett-Packard is committed to compliance with all applicable environmental laws and regulations, including the European Union Restriction of Hazardous Substances (RoHS) Directive. HP's goal is to exceed compliance obligations by meeting the requirements of the RoHS Directive on a worldwide basis. By July 1, 2006, RoHS substances will be virtually eliminated (virtually = to levels below legal

Technical Specifications – Environmental Data

limits) for all HP electronic products subject to the RoHS Directive, except where it is widely recognized that there is no technically feasible alternative (as indicated by an exemption under the EU RoHS Directive).

Material Usage

This product does not contain any of the following substances in excess of regulatory limits (refer to the HP General Specification for the Environment at:

http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen_specifications.html):

- Asbestos
- Certain Azo Colorants
- Certain Brominated Flame Retardants - may not be used as flame retardants in plastics
- Cadmium
- Chlorinated Hydrocarbons
- Chlorinated Paraffins
- Formaldehyde
- Halogenated Diphenyl Methanes
- Lead carbonates and sulfates
- Lead and Lead compounds
- Mercuric Oxide Batteries
- Nickel - finishes must not be used on the external surface designed to be frequently handled or carried by the user.
- Ozone Depleting Substances
- Polybrominated Biphenyls (PBBs)
- Polybrominated Biphenyl Ethers (PBBEs)
- Polybrominated Biphenyl Oxides (PBBOs)
- Polychlorinated Biphenyl (PCB)
- Polychlorinated Terphenyls (PCT)
- Polyvinyl Chloride (PVC) - except for wires and cables, and certain retail packaging has been voluntarily removed from most applications.
- Radioactive Substances
- Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)

Packaging

HP follows these guidelines to decrease the environmental impact of product packaging:

- Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials.
- Eliminate the use of ozone-depleting substances (ODS) in packaging materials.
- Design packaging materials for ease of disassembly.
- Maximize the use of post-consumer recycled content materials in packaging materials.
- Use readily recyclable packaging materials such as paper and corrugated materials.
- Reduce size and weight of packages to improve transportation fuel efficiency.
- Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.

End-of-life Management and Recycling

Hewlett-Packard offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: <http://www.hp.com/go/reuse-recycle> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: <http://www.hp.com/go/recyclers>. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.

Technical Specifications – Environmental Data

**Hewlett-Packard
Corporate
Environmental
Information**

For more information about HP's commitment to the environment:

Global Citizenship Report

<http://www.hp.com/hpinfo/globalcitizenship/qcreport/index.html>

Eco-label certifications

<http://www.hp.com/hpinfo/globalcitizenship/environment/productdesign/ecolabels.html>

ISO 14001 certificates:

<http://www.hp.com/hpinfo/globalcitizenship/environment/operations/envmanagement.html>

After-Market Options (availability may vary by region)

Communication Devices

	DM	USDT	SFF/TWR	Part Number
Intel Ethernet I210 – T1 Gbe NIC			X	E0X95AA
Intel 6205 802.11 a/b/g/n PCIe x1 NIC			X	E0X93AA

Graphics Solutions

	DM	USDT	SFF/TWR	Part Number
AMD Radeon HD 8350 Graphics (PCIe x16)			X	E1C63AA
AMD Radeon HD 8490 Graphics Card			X	E1C64AA
Nvidia NVS 310 Graphics (PCIe x16)			X	A7U59AA
Nvidia NVS 315 Graphics (PCIe x16)			X	E1C65AA
HP USB Graphics Adapter		X	X	NL571AA
HP DisplayPort Cable Kit	X	X	X	VN567AA
HP DisplayPort To Dual Link DVI-D Adapter	X	X	X	NR078AA
HP DisplayPort To DVI-D Adapter	X	X	X	FH973AA
HP DisplayPort to HDMI Adapter	X	X	X	BP937AA
HP DisplayPort to VGA Adapter	X	X	X	AS615AA
HP DMS-59 to Dual DVI Cable			X	DL139A
HP DMS-59 to Dual DisplayPort Adapter			X	XP688AA

Data Storage Drives and Accessories

	DM	USDT	SFF/TWR	Part Number
HP 500-GB 7.2K rpm SATA 6.0Gb/s 3.5" Hard Disk Drive			X	QK554AA
HP 1-TB 7.2K rpm SATA 6.0Gb/s 3.5" Hard Disk Drive			X	QK555AA
HP 1-TB 10K rpm SATA 6.0Gb/s 3.5" Hard Disk Drive			X	C2T91AA
HP 128-GB SATA 3.0Gb/s Solid State Drive	X	X	X	QV063AA
HP 160-GB SATA 3.0Gb/s Solid State Drive	X	X	X	QV064AA*
HP 500-GB SATA 3.0Gb/s Solid State Hybrid Drive	X	X	X	E1C62AA
HP 128-GB SED Opal 2 Solid State Drive	X			G1K24AA
HP Slim Removable SATA Hard Drive Enclosure (frame & carrier)		X	X	C1N41AA
HP Slim Removable SATA Hard Drive Enclosure (carrier only)		X	X	E3F39AA
HP Chassis (1bay) Security Kit			TWR only	AR639AA

*Not available in all regions.

Input Devices

	DM	USDT	SFF/TWR	Part Number
HP USB Keyboard	X	X	X	QY776AA
HP USB Gray Keyboard	X	X	X	B6B64AA
HP USB Smart Card (CCID) Keyboard	X	X	X	BV813AA
HP USB Keyboard and Mouse Kit	X	X	X	B1T09AA
HP USB Washable Keyboard	X	X	X	VF097AA
HP USB and PS/2 Washable Mouse	X	X	X	BM866AA
HP USB and PS/2 Washable Keyboard and Mouse Kit	X	X	X	BU207AA
HP PS/2 Mouse	X	X	X	QY775AA
HP USB Mouse	X	X	X	QY777AA
HP USB 1000dpi Laser Mouse	X	X	X	QY778AA
HP Wireless Keyboard and Mouse Combination*	X	X	X	QY449AA

After-Market Options (availability may vary by region)

*Keyboard contains 25% post-consumer recycled plastic material

System Memory

	DM	USDT	SFF/TWR	Part Number
HP 4GB DDR3-1600 (PC3-12800) DIMM			X	B4U36AA
HP 8GB DDR3-1600 (PC3-12800) DIMM			X	B4U37AA
HP 4GB DDR3-1600 (PC3-12800) SODIMM	X	X		B4U39AA
HP 8GB DDR3-1600 (PC3-12800) SODIMM	X	X		B4U40AA

Multimedia Devices

	DM	USDT	SFF/TWR	Part Number
HP Slim DVD-ROM Drive		X	X	VP033AA
HP Slim SuperMulti DVD Writer Drive		X	X	QS209AA
HP USB HD 720P v2 Business Webcam	X	X	X	D8Z08AA
HP Business Headset	X	X	X	QK550AA
HP USB Business Speakers	X	X	X	D9J19AA

Removable Media Storage

	DM	USDT	SFF/TWR	Part Number
HP 14-n-1 Media Card Reader			X	TBD

Security Devices

	DM	USDT	SFF/TWR	Part Number
HP USDT Rear Port Controller Cover		X		VN571AA
HP Solenoid Lock and Hood Sensor (USDT/SFF)		X	X	E0X97AA
HP Solenoid Lock and Hood Sensor (TWR)			TWR only	E0X96AA
HP SFF Wall Mount/Security Sleeve			SFF only	VN570AA
HP UltraSlim Cable Lock	X	X	X	H4D73AA

Stands and Accessories

	DM	USDT	SFF/TWR	Part Number
HP Integrated Work Center – Desktop Mini / Thin Client (IWCdm)	X			G1V61AA
HP Integrated Work Center Stand (SFF)			SFF only	QP897AA
HP USDT Tower Stand		X		VN568AA
HP SFF Tower Stand			SFF only	VN569AA
HP DM Chassis Tower Stand	X			G1K23AA
HP 600/800 Tower Bezel Kit			TWR only	E1C66AA
HP 800/600 SFF Bezel Kit			SFF only	E3F27AA
HP 800 USDT Kit		X		E3F28AA
HP Serial Port Adapter (RS-232 compatible)			X	PA716A
HP Parallel Port Kit			X	KD061AA
HP PCI Expansion Kit			TWR only	E1V16AA
Belkin USB to Serial Adapter	X	X		EM449AA

LANDesk Software (E-Delivery)

	Part Number
LANDesk Management Suite License - 1-499 Nodes E-Delivery	QY369AAE
LANDesk Management Suite License - 500-999 Nodes E-Delivery	QY370AAE

After-Market Options (availability may vary by region)

LANDesk Management Suite License - 1000-1999 Nodes E-Delivery	QY371AAE
LANDesk Management Suite License - 2000-4999 Nodes E-Delivery	QY372AAE
LANDesk Management Suite License - 5000-9999 Nodes E-Delivery	QY373AAE
LANDesk Security Suite License E-Delivery	QY379AAE
LANDesk Management Suite 1 Year Maintenance - 1-499 Nodes E-Delivery	HZ825AAE
LANDesk Management Suite 1 Year Maintenance - 500-999 Nodes E-Delivery	HZ826AAE
LANDesk Management Suite 1 Year Maintenance - 1000-1999 Nodes E-Delivery	HZ827AAE
LANDesk Management Suite 1 Year Maintenance - 2000-4999 Nodes E-Delivery	HZ828AAE
LANDesk Management Suite 1 Year Maintenance - 5000-9999 Nodes E-Delivery	HZ829AAE
LANDesk Security Suite 1 Year Subscription	HZ830AAE
LANDesk Patch Management 1 Year Subscription - 1-499 Nodes E-Delivery	HZ831AAE
LANDesk Patch Management 1 Year Subscription - 500-999 Nodes E-Delivery	HZ832AAE
LANDesk Patch Management 1 Year Subscription - 1000-1999 Nodes E-Delivery	HZ833AAE
LANDesk Patch Management 1 Year Subscription - 2000-4999 Nodes E-Delivery	HZ834AAE
LANDesk Patch Management 1 Year Subscription - 5000-9999 Nodes E-Delivery	HZ835AAE
LANDesk Patch Management 1 Year Subscription - 5000-9999 Nodes E-Delivery	HZ835AAE

© Copyright 2014 Hewlett-Packard Development Company, L.P. All rights reserved.

The information contained herein is subject to change without notice and is provided "as is" without warranty of any kind. The warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein. Microsoft, Windows and Windows 7 are registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries. Intel and Core are registered trademarks or trademarks of Intel Corporation in the U.S. and/or other countries. Bluetooth is a registered trademark of Bluetooth SIG, Inc., in the U.S. and other countries. All other product names mentioned herein may be trademarks of their respective companies.

After-Market Options (availability may vary by region)

May 2014

Change Log

Date of change:	Version History:		Description of change:
May 28, 2014	From v2.0 to v2.1	Changed	Updated the wattage consumption for the DM.
May 30, 2014	From v2.1 to v2.2	Changed	Updated 3 rd party software
June 2, 2014	From v2.2 to v2.3	Changed	Processors, storage, environmental.